TOSHIBA













The Efficient, Climate-Friendly and Smart Inverter Multi-Split System.





Toshiba Air-Conditioning Singapore



Toshiba was the world's first company to incorporate inverter technology into residential air-conditioning systems, effectively reducing energy loss in air-conditioners.

In 1999, Toshiba and Carrier formed a global joint venture called Toshiba Carrier Corporation. Through this alliance, Toshiba provides technological and manufacturing expertise for inverter-based products, while Carrier leverages its global reach to distribute them outside of Japan.

Toshiba Carrier continues to deliver innovative solutions that contribute towards a sustainable future for generations to come. Committed to people, committed to the future; we make and do things that lead to a better world.















Energy

Saving

Enhanced Indoor
Air Quality




Smart Control



Easy-Care

Energy efficiency

The NEA energy label is used to display the energy efficiency of household appliances.

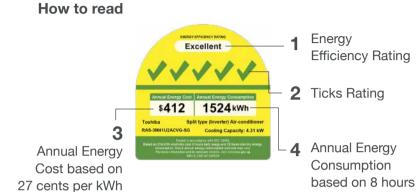


2

Climate-friendliness

Refrigerants can contribute to global warming when released into the atmosphere, and this is measured by its Global Warming Potential (GWP). In 2020, NEA rolled out a new label that enables consumers to identify air-conditioners that use climate-friendly refrigerants.



daily usage

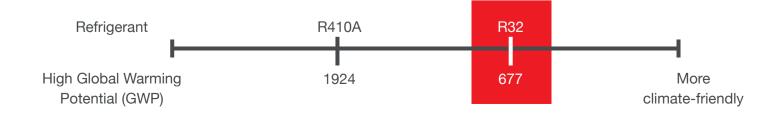

electricity cost

3

Right capacity


BTU (British Thermal Unit)/hr measures the cooling capacity of an air-conditioner. This is an approximate guide that is dependent on the actual heat load of the room to be cooled. For a more accurate recommendation, please check with our authorised dealers and installers.

| Room Type | Area in Sq Ft. (Sqm) | kBTU/hr Required |
|-------------------|-------------------------|------------------|
| Small Room | 100-150 (9-14) | 9 |
| Master Bedroom | 150-250 (14-23) | 12 |
| Living Room/Halls | 300-400 (28-37) | 18 - 24 onwards |

4

Suitable system

| No. of rooms to cool | System Required | No. of indoor units (blower) | No. of outdoor units (compressor) |
|-------------------------|--------------------|------------------------------|-----------------------------------|
| 2 | System 2 | 2 | 1 |
| 3 | System 3 | 3 | 1 |
| 4 | System 4 | 4 | 1 |
| 5 | System 5 | 5 | 1 |

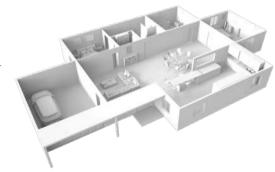

5

Easy maintainance

Enjoy clean air between maintenance intervals with advanced technology like our YouMe's Magic Coil* and Self-Cleaning feature*. Regular maintenance intervals of 6 months is recommended to upkeep the condition and performance of your air-conditioner. For queries on air-conditioner servicing and maintenance, please contact your installer or any of our authorised dealers.

^{*}Read more on page 11.

SHIPS OF HALLS


The Climate-Friendly Choice






Planet-Friendly Refrigerant

With up to 72% fewer CO2 emissions than its R410A counterpart, the R32 is a more climate-friendly refrigerant with lower global warming potential (GWP) and zero ozone depletion (ODP). Toshiba YouMe is proud to be the first 5-Tick Inverter Multi-spilt R32 air-conditioner in Singapore.

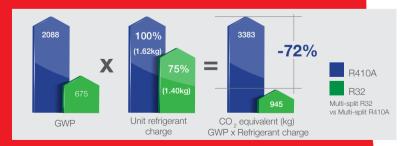


Quick Cooling



13% bigger fans than standard air-conditioners

Enjoy quicker and quieter cooling with YouMe's redesigned fan in its indoor unit. Now 13% bigger with special skewed blades, this increases airflow while reducing the sound level by up to 8% versus conventional blades.



30% larger heat exchanger surface area


Paired with a 30% larger heat exchanger thanks to an increased copper tube count in the coil, cold air can now enter your room more efficiently.

Once the set point is reached, lower fan speeds quietly maintain your desired temperature while reducing energy consumption.

Energy Saving




Cool your rooms with less time and energy thanks to Toshiba's inverter technology. Now with Toshiba's DC Hybrid Inverter System, the Pulse Amplitude Modulation (PAM) sets the compressor at maximum power in order to reduce the time to reach the set point temperature. Once the set point is reached, the Pulse Width Modulation (PWM) lowers the variable speed of the compressor to precisely maintain room temperature, thereby using less energy.

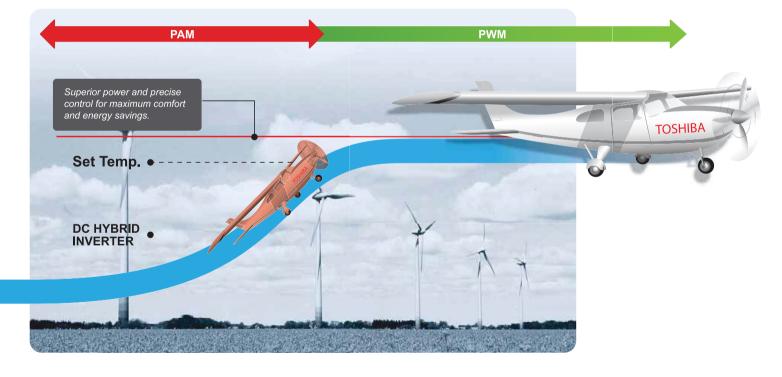

Dark Mode

For better sleep, adjust the brightness of your YouMe's halo light, or switch it off completely.

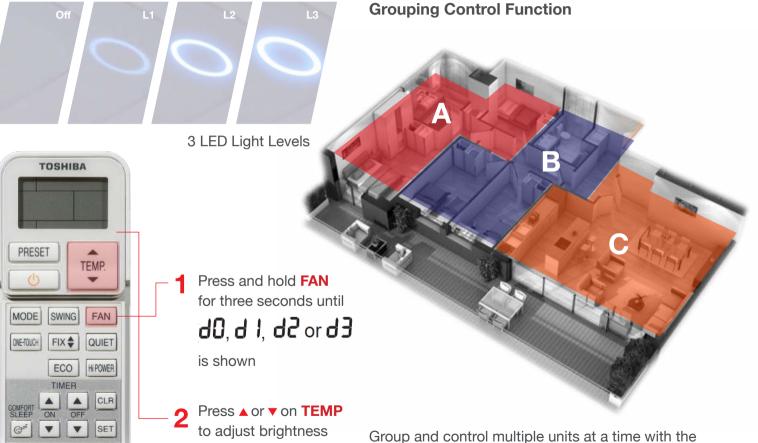

Smart Control

Take control from the comfort of wherever you

app's Smart Air-Conditioner Grouping Control.

are with the new Toshiba Home AC Control app.

Set Up the App in 3 Simple Steps

1 Download the App from the App Store.





2 Register and log in.

Smart Home Assistant

Compatible

Add the air-conditioner wireless adapter under:


Home page > Add air-conditioner

OR

Settings > Add AC (Adapter)

For more information on set-up and usage, please refer to the user manual that can be found with your YouMe or in the app itself.

Enhanced Indoor Air Quality



PM2.5


Purification

Now indoor air quality (IAQ) is more important than ever. Toshiba Ultra Pure filter creates clean and healthy living spaces at home by capturing up to 94% of PM 2.5 (atmospheric particulate matters with diameters of less than 2.5 micrometers).

Easy-Care


Between maintenance intervals. YouMe's feature make things easy for you so that that you can enjoy healthy air all year round.

Magic Coil

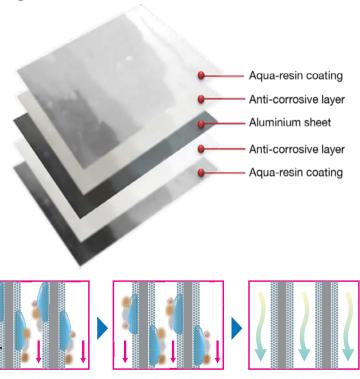

Not only does YouMe cool more efficiently, but it also keeps the air you breathe fresh and clean. That is why along with an active carbon filter, YouMe uses a special agua-coated aluminum fin heat exchanger, Magic Coil, that helps keep dirt and debris from building up on your coils.

Self-cleaning FCU

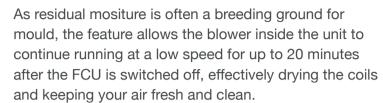

Normal Operation

Moisture stays trapped inside during operation



Self-Cleaning Function

20 minutes of fan operation after shut down dries the moist air and helps reduce mould formation.



Easy Cleaning

YouMe makes regular light cleaning effortless for any home owner. With a new, smooth grille and easy to remove vertical louvre, your YouMe can be kept dust-free with just 3 simple steps.

- Wipe the new, smooth grille with a damp sponge
- Remove and rinse the pre-filter
- Remove the vertical louvre to clean the cross-flow fan











Technical specifications



| Encepy Cont | Armal Energy Comunication | Are and Energy Co |
|-----------------|--|-----------------------------|
| 112 | 1524kWh | \$886 |
| Spi DACVIJOS | It type (Inverter) Air conditioner Cooling Capacity: 4.21 kW | Toshin Ras-Basticsacvici |
| | The second section of the second seco | Seed of Children describe |

| Treshibe: Split type (inverter) Air conditioner RAS-SMETUZACYOLOS Cooking Capacity: 4.21 bW | Traible: Salt type (breater) Air conditioner HAS-SMETLENCHY, 698 Coding Capacity: 8.21 kW |
|--|---|
| Section 2014 of the Company of the C | Security Children in Security and Address. Security Children in Security and Address of the Security and Address |
| 3x | 1x 4x |
| | |
| 3-rooms | 5-rooms |
| 3M41U2ACVG-SG | 5M51U2ACVG-SG |



| Indoor Unit |
|--------------------------|
| Technical specifications |
| |

| RAS | M10U2KCVG-SG1 | M13U2KCVG-SG1 | M18U2KCVG-SG1 | M24U2KCVG-SG1 | M26U2KCVG-SG1 |
|-------------------------------------|-----------------|-----------------|-----------------|-------------------|-------------------|
| Standard air flow (H) m3/h - I/h | 790 - 220 | 790 - 220 | 790 - 220 | 985 - 275 | 1,075- 300 |
| Sound pressure level (L/H) dB(A) | 23/43 | 24/44 | 24/45 | 34/45 | 35/47 |
| Dimensions (H x W x D) | 293 x 798 x 230 | 293 x 798 x 230 | 293 x 798 x 230 | 320 x 1,050 x 250 | 320 x 1,050 x 250 |
| Weight kg | 10 | 10 | 10 | 14 | 14 |
| Flare connections - Gas | ф9.52 | ф9.52 | ф12.7 | ф12.7 | ф12.7 |
| Flare connections - Liquid mm | ф6.35 | ф6.35 | ф6.35 | ф6.35 | ф6.35 |

Rated conditions: Cooling; Indoor air temperature 27°C DB / 19°C WB, Outdoor air temperature 35°C DB.

Specifications

| RAS | 2-rooms 2M21U2ACVG-SG | 3-rooms 3M31U2ACVG-SG | 3-rooms 3M41U2ACVG-SG | 5-rooms 5M51U2ACVG-SG | |
|---|--------------------------|--------------------------|--------------------------|--------------------------|--|
| Cooling capacity (rated) kW | 4.5 | 6.0 | 4.3 | 8.3 | |
| Cooling capacity (min max.) kW | 2.25 - 5.50 | 2.50 - 7.50 | 2.15 - 7.50 | 3.70 - 11.50 | |
| Power input kW | 0.925 | 1.235 | 0.754 | 1.695 | |
| Weighted COP / Energy Efficiency Class (Tick) | 5.76 / 5 | 5.70 / 5 | 6.12 / 5 | 5.51 / 5 | |
| Sound pressure level dB(A) | 51 | 53 | 52 | 53 | |
| Operating range °C | 10 ~ 46 | 10 ~ 46 | 10 ~ 46 | 10 ~ 46 | |
| Dimensions (H x W x D) mm | 630 x 800 x 300 | 630 x 800 x 300 | 630 x 800 x 300 | 890 x 900 x 320 | |
| Weight kg | 45 | 47 | 48 | 74 | |
| Compressor type | DC Twin rotary | DC Twin rotary | DC Twin rotary | DC Twin rotary | |
| Flare connections - Gas mm | ф9.52 х 2 | ф12.7 + ф9.52 х 2 | ф12.7 + ф9.52 х 2 | ф12.7 х 2 + ф9.52 х 3 | |
| Flare connections - Liquid mm | ф6.35 х 2 | ф6.35 х 3 | ф6.35 х 3 | ф6.35 х 5 | |
| Maximum pipe length (per unit/total) m | 20/30 | 25/50 | 25/50 | 25/80 | |
| Maximum height difference m | 10 | 10 | 10 | 15 | |
| Power supply V/ph/Hz | 220-230/1/50 | 220-230/1/50 | 220-230/1/50 | 220-230/1/50 | |

Rated conditions: Cooling; Indoor air temperature 27°C DB / 19°C WB, Outdoor air temperature 35°C DB.

2 Rooms

RAS-2M21U2ACVG-SG 230V

| Co | ombinati | on | Unit | capacity | (kW) | Cooling capacity (kW) | | | /) Power input (W) | | | Operating current (A) | | | COP |
|--------|----------|--------|--------|----------|--------|-----------------------|-------|------|--------------------|-------|------|-----------------------|-------|------|-------|
| Unit A | Unit B | Unit C | Unit A | Unit B | Unit C | Min. | Rated | Max. | Min. | Rated | Max. | Min. | Rated | Max. | Rated |
| 10 | 10 | _ | 2.25 | 2.25 | - | 2.25 | 4.50 | 5.50 | 375 | 925 | 1350 | 2.10 | 4.30 | 6.10 | 4.86 |
| 13 | 10 | - | 2.60 | 1.90 | - | 2.25 | 4.50 | 5.50 | 375 | 915 | 1350 | 2.10 | 4.25 | 6.10 | 4.92 |
| 18 | 10 | _ | 2.81 | 1.69 | - | 2.25 | 4.50 | 5.50 | 375 | 905 | 1350 | 2.10 | 4.20 | 6.10 | 4.97 |
| 13 | 13 | - | 2.25 | 2.25 | - | 2.25 | 4.50 | 5.50 | 375 | 905 | 1350 | 2.10 | 4.20 | 6.10 | 4.97 |
| 18 | 13 | - | 2.47 | 2.03 | - | 2.25 | 4.50 | 5.50 | 375 | 895 | 1350 | 2.10 | 4.15 | 6.10 | 5.03 |
| 18 | 18 | - | 2.25 | 2.25 | - | 2.25 | 4.50 | 5.50 | 375 | 885 | 1350 | 2.10 | 4.10 | 6.10 | 5.08 |

3 Rooms

RAS-3M31U2ACVG-SG

| Co | ombinati | ion | Unit | capacity | (kW) | Coolin | Cooling capacity (kW) | | | V) Power input (W) | | | Operating current (A) | | |
|--------|----------|--------|--------|----------|--------|--------|-----------------------|------|------|--------------------|------|------|-----------------------|------|-------|
| Unit A | Unit B | Unit C | Unit A | Unit B | Unit C | Min. | Rated | Max. | Min. | Rated | Max. | Min. | Rated | Max. | Rated |
| 10 | 10 | 10 | 2.00 | 2.00 | 2.00 | 2.50 | 6.00 | 7.50 | 415 | 1235 | 2055 | 2.35 | 5.70 | 9.45 | 4.86 |
| 13 | 10 | 10 | 2.44 | 1.78 | 1.78 | 2.50 | 6.00 | 7.50 | 400 | 1225 | 2055 | 2.25 | 5.65 | 9.40 | 4.90 |
| 18 | 10 | 10 | 2.73 | 1.64 | 1.64 | 2.50 | 6.00 | 7.50 | 400 | 1215 | 2055 | 2.25 | 5.60 | 9.40 | 4.94 |
| 13 | 13 | 10 | 2.20 | 2.20 | 1.60 | 2.50 | 6.00 | 7.50 | 400 | 1225 | 2055 | 2.25 | 5.65 | 9.40 | 4.90 |
| 18 | 13 | 10 | 2.47 | 2.04 | 1.50 | 2.50 | 6.00 | 7.50 | 400 | 1210 | 2055 | 2.25 | 5.60 | 9.40 | 4.96 |
| 13 | 13 | 13 | 2.00 | 2.00 | 2.00 | 2.50 | 6.00 | 7.50 | 400 | 1215 | 2055 | 2.25 | 5.60 | 9.40 | 4.94 |

3 Rooms (High COP)

RAS-3M41U2ACVG-SG

| Co | ombinati | on | Unit | capacity | (kW) | Coolin | g capaci | ty (kW) | Pow | ver input | (W) | Operating current (A) | | | СОР |
|--------|----------|--------|--------|----------|--------|--------|----------|---------|------|-----------|------|-----------------------|-------|------|-------|
| Unit A | Unit B | Unit C | Unit A | Unit B | Unit C | Min. | Rated | Max. | Min. | Rated | Max. | Min. | Rated | Max. | Rated |
| 10 | 10 | 10 | 1.44 | 1.43 | 1.43 | 2.15 | 4.30 | 7.50 | 356 | 754 | 1800 | 2.05 | 3.54 | 8.13 | 5.70 |
| 13 | 10 | 10 | 1.70 | 1.30 | 1.30 | 2.15 | 4.30 | 7.50 | 356 | 752 | 1795 | 2.04 | 3.53 | 8.13 | 5.72 |
| 18 | 10 | 10 | 1.92 | 1.19 | 1.19 | 2.15 | 4.30 | 7.50 | 356 | 752 | 1790 | 2.04 | 3.53 | 8.10 | 5.72 |
| 13 | 13 | 10 | 1.55 | 1.55 | 1.20 | 2.15 | 4.30 | 7.50 | 356 | 752 | 1795 | 2.04 | 3.53 | 8.13 | 5.72 |
| 18 | 13 | 10 | 1.77 | 1.43 | 1.10 | 2.15 | 4.30 | 7.50 | 356 | 752 | 1790 | 2.04 | 3.53 | 8.10 | 5.72 |
| 13 | 13 | 13 | 1.44 | 1.43 | 1.43 | 2.15 | 4.30 | 7.50 | 356 | 752 | 1790 | 2.04 | 3.53 | 8.10 | 5.72 |

5 Rooms

RAS-5M51U2ACVG-SG

230V

Unit capacity (kW) Cooling capacity (kW) Combination Power input (W) Operating current (A) Unit A | Unit B | Unit C | Unit D | Unit E | Unit A | Unit B | Unit C | Unit D | Unit E | Min. | Rated | Max. 10 10 1.66 1.66 1.66 1.66 3.70 8.30 11.50 725 1695 3165 3.80 7.55 | 13.75 | 4.90 13 10 10 10 2.02 1.57 1.57 1.57 1.57 3.70 8.30 11.50 725 1695 3160 3.80 7.55 13.70 4.90 18 10 10 10 10 2.38 1.48 1.48 1.48 1.48 3.70 8.30 11.50 725 1690 3155 3.80 7.50 13.70 4.91 24 10 10 2.94 1.34 1.34 1.34 1.34 3.70 8.30 11.50 725 3150 3.80 7.45 13.65 4.91 26 10 10 10 3.10 1.30 3.70 8.30 725 7.50 1.30 1.30 11.50 3145 3.80 13.65 4.93 13 10 10 1.93 1.93 3.70 8.30 11.50 725 1690 7.50 13 1.48 3155 3.80 13.70 4.91 18 13 10 2.24 1.41 1.41 1.41 3.70 8.30 11.50 725 1690 3150 3.80 7.50 4.91 24 13 10 10 10 2.80 1.66 1.28 1.28 1.28 3.70 8.30 11.50 725 1685 3145 3.80 7.50 13.65 4.93 26 13 10 10 10 2.97 1.61 1.24 1.24 1.24 3.70 8.30 11.50 725 1685 3140 3.80 7.50 4.93 13.65 13 13 13 10 10 1.83 1.83 1.83 1.40 1.40 3.70 8.30 11.50 725 1690 3155 3.80 7.50 13.75 4.91 18 13 13 10 10 2.14 1.74 1.74 1.34 1.34 3.70 8.30 11.50 725 1690 3150 3.80 7.50 13.70 4.91 24 13 13 10 10 2.68 1.59 1.59 1.22 1.22 3.70 8.30 11.50 725 3140 3.80 7.50 13.65 4.93 26 13 13 10 10 2.86 1.53 1.53 1.19 1.19 3.70 8.30 11.50 725 3140 3.80 7.50 13.65 4.93 13 13 13 13 10 1.74 1.74 1.74 1.34 3.70 8.30 11.50 725 3150 4.91 18 13 13 13 10 2.04 1.66 1.28 3.70 8.30 11.50 725 1685 3145 3.80 7.50 13.70 4.93 1.66 1.66 24 13 13 13 10 2.57 1.52 1.52 1.52 1.17 3.70 8.30 11.50 725 1685 3135 3.80 7.45 13.60 4.93 26 13 13 13 10 2.72 3.70 8.30 11.50 725 3135 3.80 13.60 4.94 1.48 1.14 7.45 13 13 13 13 1.66 1.66 1.66 3.70 8.30 11.50 725 1690 3150 3.80 7.50 13.65 18 13 13 1.59 3.70 8.30 11.50 725 3.80 7.50 18 13 13 1.87 1.52 1.52 1.52 3.70 8.30 11.50 725 4.94 3135 3.80 18 18 18 10 10 1.95 1.95 1.95 1.22 1.22 3.70 8.30 11.50 725 1680 3135 3.80 7.45 13.60 4.94 24 18 10 10 2.57 1.87 1.52 1.17 725 4.94 13 1.17 3.70 8.30 11.50 1680 3135 3.80 7.45 13.60 18 10 10 10 2.84 1.89 1.19 1.19 1.19 3.70 8.30 11.50 725 1680 3135 3.80 7.45 | 13.60 | 4.94

Carrier Singapore (Pte) Limited

28 Teban Gardens Crescent Singapore 608926

Service Call Center: +65 6567 5337

Email: enquiries.toshibaaircon@carrier.com

Operating Hours: 9am to 5pm

Monday to Friday, excluding Public Holiday

www.toshiba-aircon.com.sg





© 2021 Toshiba

The manufacturer reserves the right to discontinue or change the products' specifications or designs at any time, without notice and without incurring obligations.

