

DAIKIN

Perfecting the Air



Split Type Air Conditioners

iSmart Envi
SERIES



NEW ADVANCE
AIR QUALITY
FILTER



HIGHER ENERGY
EFFICIENCY



HUMIDITY
CONTROL



QUIET
OPERATION



SMART AND VOICE
CONTROL



WITH MORE THAN

90

YEARS OF EXPERIENCE



Perfecting the Air

Since its inception, Daikin is renowned as the true creator in global air conditioning industry through relentless innovation in technology and product design.

Continuing its legacy as the leader in air conditioning, Daikin remains committed to refining next generation of cooling solution and taking the air conditioning beyond its previous limitations.

BRAND FOR ALL COOLING SOLUTIONS

widest range of air conditioners across the globe

MULTI-AWARD WINNER

& Well Trusted Brand**

dedicated team to offer customers with HIGH QUALITY AFTER SALES SERVICE

& only Japanese company SPECIALIZING IN AIR CONDITIONING

FIRST HDB MULTI ROOM air conditioning system*

5 REASONS TO CHOOSE DAIKIN



WHY DAIKIN?

AIR-CONDITIONING SPECIALIST



NET SALES AMOUNT TO \$27 BILLION



\$300 MILLION R&D INVESTMENT



UNLOCKING HUMAN POTENTIAL PEOPLE-CENTERED MANAGEMENT



3 CORE TECHNOLOGIES HEAT PUMP INVERTER REFRIGERANT



OVER 100 WORLDWIDE PRODUCTION BASES



FOUNDED IN 1924



50% LOCAL HIRES




SOLD IN OVER 170 COUNTRIES



* Records Given by Singapore Book of Records

SMART AND CLEAN AIR CONTROL

You can now control the iSmart Envi series with your smartphone and your voice using smart speakers! A new Air Quality Filter also removes allergic substances, bacteria and viruses as well as PM 2.5.

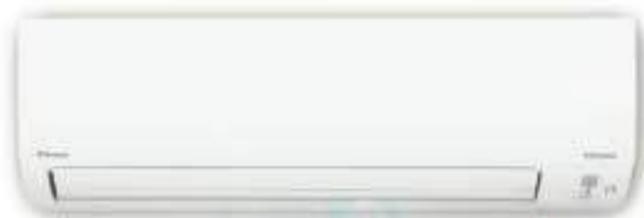

PAGE 5

ENVIRONMENTAL FRIENDLY R32 REFRIGERANT

As an equipment manufacturer, Daikin believes it must work to reduce the greenhouse emissions throughout the entire product life cycle. Hence, Daikin has adopted R32 into multisplit series.



PAGE 7

BUILT-IN SMART CONTROL AND VOICE CONTROL

Built-in with smarter, more convenient, more energy saving functions & controls to cool your home in style with Newly Added Voice Control.



PAGE 11

HUMIDITY CONTROL AND QUIET OPERATION


A new humidity sensor boosts dehumidification volumes so you always feel fresh and cool. Sound levels are also as quiet as just 19 dB (A).



PAGE 13

NEW ADVANCED AIR QUALITY FILTER

The iSmartEnvi series now comes with a New Advanced Air Quality Filter which combines deodorising filter (enzyme Blue) and dust collection filter (PM2.5) which absorbs and removes household odours, allergic substances, bacteria and viruses as well as PM2.5

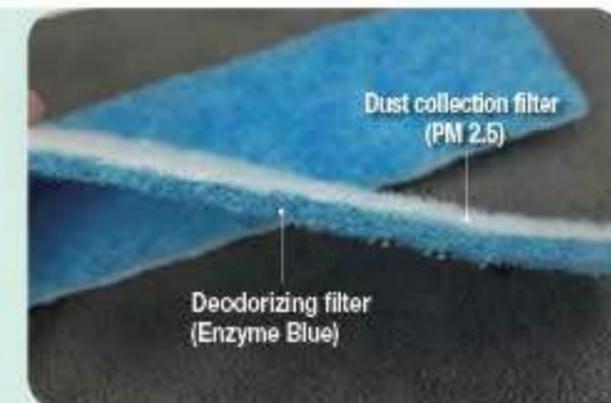

R-32 Next-generation refrigerant

DAIKIN is the only aircon manufacturer in the world to produce both air conditioning equipment and refrigerant.

As a refrigerant manufacturer, Daikin believes it has a responsibility to expand the use of substances with zero ozone layer depletion and to reduce greenhouse gas emissions. As an equipment manufacturer, Daikin believes it must work to reduce the greenhouse emissions throughout the entire product life cycle. Hence, Daikin has adopted R-32 into this series too.



Zero

Ozone Depletion Potential (ODP)

Ozone depletion is the reduction in amount of ozone layer in the stratosphere due to pollutants such as chlorofluorocarbons. By using R-32 Refrigerant, there is zero impact on the ozone layer depletion.

Lower

Global Warming Potential (GWP)

What is Global Warming Potential (GWP)?

GWP is a measure of how much energy the emission of 1 ton of a gas will be absorbed over a given period of time, relative to the emissions of 1 ton of Carbon Dioxide.

The larger the GWP, the more that a given gas warms the Earth compared to CO₂ over that time period.

Environmental Impact of Air Conditioner Refrigerants and Trends

	Ozone Depletion Potential (ODP)	100 Year Global Warming Potential of Different Refrigerants*1
R-22 (HFC)	0.055	1,810
R-410A (HFC)	0	2,090
R-32 (HFC)	0	675

*1) Values for 100 year global warming potential (GWP) from IPCC Fourth Assessment Report. Comparative 100 year GWP: HFC410A, 2,090; HFC32, 675.

Reduced Impact on Global Warming

R-32 has only around 30% of the GWP of R-22 and R-410A. Its potential refrigerating effect is also 1.5 times higher and it requires only approximately 70% of the charging volume. Together, these factors mean R-32 has just 23% of the theoretical impact on global warming of R-22 and R-410A.

Higher Energy Efficiency

The cooling seasonal performance factor (CSPF) of R-32 is higher than R-22 and R-410A. Its peak power consumption ratio is also lower, helping to alleviate power shortages in large cities during periods of high demand.



Notes: 1. Global warming potential values are based on the Fourth Assessment Report from the Intergovernmental Panel on Climate Change (IPCC).

$$2. \text{CSPF} = \frac{\text{Cooling seasonal total load (kWh)}}{\text{Cooling seasonal energy consumption (kWh)}}$$

3. Precondition for calculation

- Values are for a 3.5 kW split type cooling only model. • Peak power consumption are based on indoor/outdoor temperatures of 27/19.5°C DB.
- CSPFs are calculated based on ISO/IEC16358-1. • Values show test results in Asia, which include India, Indonesia and Malaysia, but not China.



up to 5 ticks with MORE Benefits

Model name	FTKM25XVMG	FTKM35XVMG	FTKM50XVMG	FTKM60XVMG	FTKM71XVMG
Tick labels	5 ticks	3 ticks	3 ticks	3 ticks	2 ticks

The iSmart Envi series achieves weighted COPs of 4.40 to 5.71 and COPs of 3.38 to 4.90 thanks to Daikin's DC Inverter control and next-generation R-32 refrigerant. The FTKM25X has earned Singapore's highest 5 Ticks energy efficiency rating. Weighted COP = 0.4 × COP100% (at full load cooling capacity) + 0.6 × COP50% (part load cooling capacity).



Excellent comfort with **INVERTER TECHNOLOGY**
More Savings & Comfort with technology that manages energy efficiency.



How it works?



Our inverter system powers up to reach the desired temperature quickly. When approaching the desired temperature, the system maintains at a constant temperature without wasting energy, offering significant energy savings.



The non-inverter system continually starts and stops to maintain at the preset temperature. The repeated start-and-stop operation requires excess energy to restart the motor, resulting in energy wastage.

VOICE CONTROL THROUGH YOUR SMART SPEAKER



Hey Google, set the living room to 25°C.



Daikin Mobile Controller can be used for voice control with Google Home¹ or Amazon Echo² smart speakers and their applications. You can now control the iSmart Envi series with your voice.

Daikin Mobile Controller

Smart speakers




Google Home

or



Amazon Echo

This figure shows the situation when using Google Home and Google Assistant¹

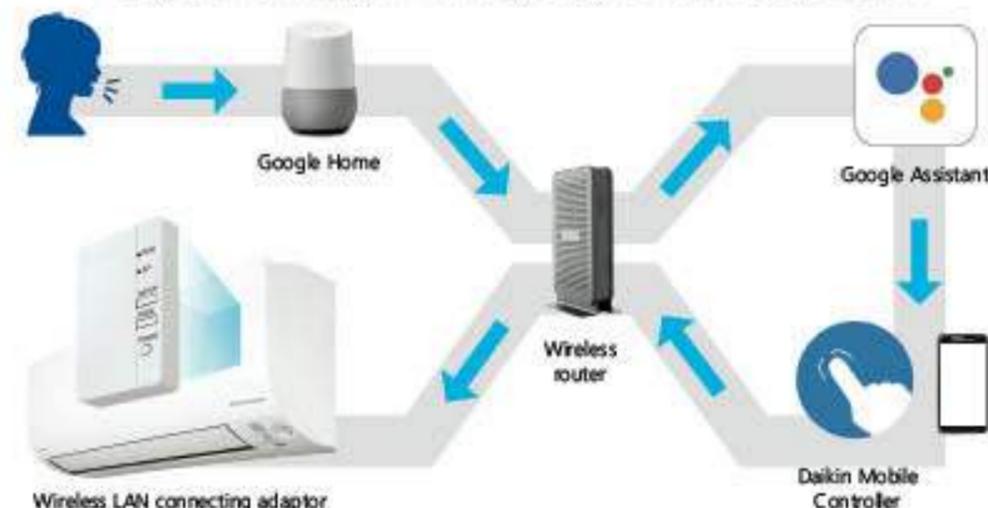

Function		Google Assistant	Amazon Alexa	
Operating setting	ON/OFF	*	*	
Operation mode setting	Automatic	*	*	
	Cooling	*	*	
	Dry	*	*	
	Fan only	*	*	
	Temperature setting	Temperature adjustment	*	*
Fan speed setting	Auto	*	*	
	Quiet	*	*	
	Fan speed adjustment	*	*	
	Fan swing setting	OFF	*	*
	Up/Down	*	*	
	Left/Right	*	*	
	3D Mode	*	*	
	Up/Down & Left/Right together	*	*	
Temperature reading	Indoor temperature	*	*	
	Outdoor temperature	*	*	


Notes: 1. Google Assistant, the Google Assistant logo, Google Home and the Google Home logo are trademarks of Google LLC.
 2. Amazon, Echo, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.
 3. Users need to prepare a smartphone, smart speaker and wireless router as well as these applications: Daikin Mobile Controller (free) and Google Assistant or Amazon Alexa.
 The router may not be required depending on the conditions of existing LANs used to monitor or control air conditions in houses and buildings.
 4. The controllable operations differ depending on the model. Please confirm the availability of desired operations before purchasing.

Feel Fresh and Cool

PROGRAMME DRY FUNCTION WITH HUMIDITY SENSOR

The iSmart Envi series delivers an impressive 25% increase in dehumidifying capacity¹, thanks to its advanced humidity sensor technology. This new sensor enables the unit to extract moisture more effectively and efficiently, even at low fan speeds.

By optimizing dehumidification volumes just before condensation occurs inside the indoor unit, the iSmart Envi series delivers superior performance and comfort in any environment. Upgrade to the iSmart Envi series today and experience the difference for yourself.

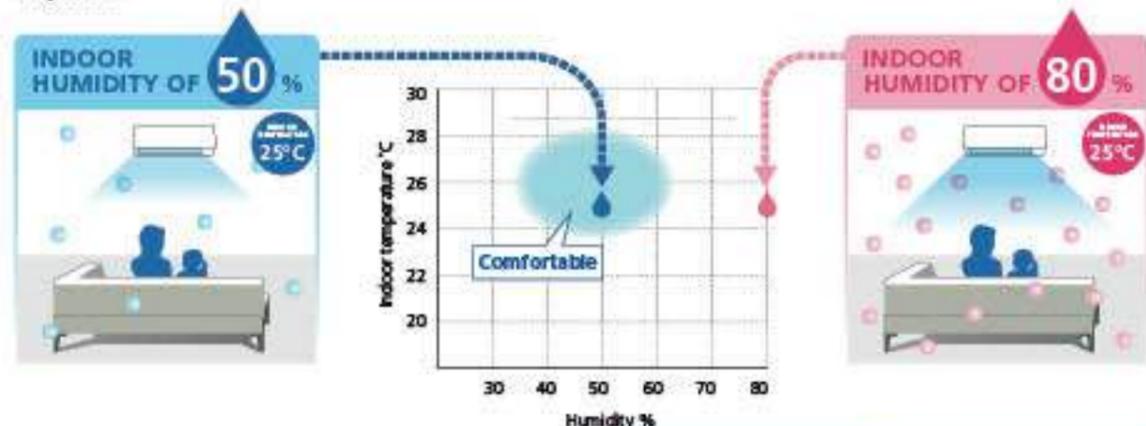

Humans release body heat by evaporating moisture on our skin, meaning we feel cooler with lower humidity. We have used this knowledge to create a more comfortable balance between temperature and humidity.



QUIETEST AT 19 DB(A)

iSmart Envi series offers whisper-quiet performance down to 19dB(A)* to further to your sense of comfort.

*I.D. temp 27 °CDB / 19 °CWB, O.D. temp 35 °C Cooling capacity is lowest one (A/C load is low). The value is different by the operating condition of the air-conditioning load of the room to be used.



WEEKLY TIMER

With Weekly Timer, you can easily schedule your air conditioner to turn on and off at specific times, as well as adjust temperatures according to your preferences. This powerful tool allows you to synchronize your AC unit with your family's daily routine, providing optimal comfort and convenience in your home. Say goodbye to manual adjustments and enjoy a more automated and efficient cooling experience with Weekly Timer!




COMFORT AIRFLOW MODE

Discover the benefits of Comfort Airflow Mode! Now, you can keep uncomfortable drafts at bay. This innovative setting ensures a pleasant cooling experience by redirecting air and moving the flap upwards, preventing direct airflow onto the body.



INTELLIGENT EYE (AUTO ENERGY SAVING)

Intelligent Eye prevents energy wastage by using its infrared sensors to detect human movement in a room. If there is no movement for 20 minutes, it automatically adjusts the set temperature by approximately 2°C. Once Intelligent Eye is turned on, it operates automatically without any further setting.

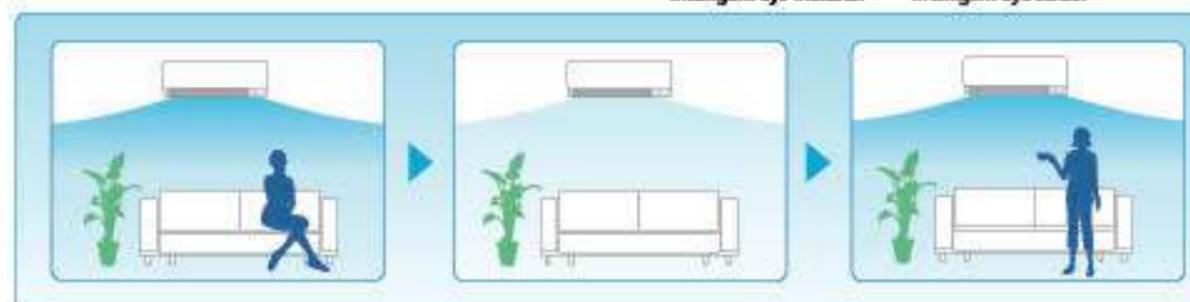

Note: 1. The FTKM-X series' dehumidifying capacity is higher than conventional DC inverter models. This is based on an in-house simulation of dehumidifying capacity with conventional dehumidification control (Programme Dry Function).
 [Test Conditions] Location: Test laboratory of Daikin Industries Thailand
 Temperature: Room temperature of 24°C, relative humidity of 60%, outdoor temperature of 24°C
 Dehumidifying capacity: FTKM35X model 1,540 cc/h, conventional 1,220 cc/h

Clean Air PURIFYING ELIMINATING BACTERIA, VIRUSES AND PM 2.5




AIR QUALITY FILTER (ENZYME BLUE/PM 2.5)¹

This new filter combines a deodorising filter (Enzyme Blue) and dust collection filter (PM 2.5). It absorbs and removes household odours, allergic substances, bacteria and viruses as well as PM 2.5. It also decomposes allergic substances using artificial enzymes. These enzymes break down the protein bonds of allergens, making them harmless.



INVISIBLE PARTICLES SMALL ENOUGH TO PENETRATE THE LUNGS

PM 2.5 refers to particulate matter which is smaller than 2.5 micrometres (µm) and does not indicate a specific substance. PM 2.5 is small enough to be breathed deep into the lungs. This may cause respiratory diseases and impact circulatory systems². PM 2.5 is produced when substances are burned in boilers, incinerators and vehicle engines. It also occurs when sulphur and nitrogen oxides emitted from thermal power plants react with light and ozone in the air³.

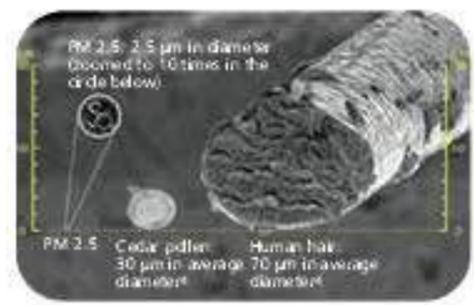


Notes: 1. This filter is not a medical device and it does not have any certification. The effectiveness of the filter depends on the room conditions and usage of the air conditioner.
 2. This information is sourced from the Japan Medical Association, <http://www.med.or.jp/forest/keyword/pm25/02.html>
 3. The picture is sourced from the Bureau of Environment of the Tokyo Metropolitan Government, http://www.kankyo.metro.tokyo.lg.jp/air/pollution/for/kumi/pm2_5/pm2_5.html
 4. The figures are sourced from the Office of Research and Development of the US Environmental Protection Agency.

Removes 90% of four particles causing household odours within one hour

Household odours include body, rubbish, pet, toilet, tobacco and others. They all contain one or more of the following four particles: ammonia, trimethylamine, hydrogen sulphide and methyl mercaptan.




Test method: JEM1487

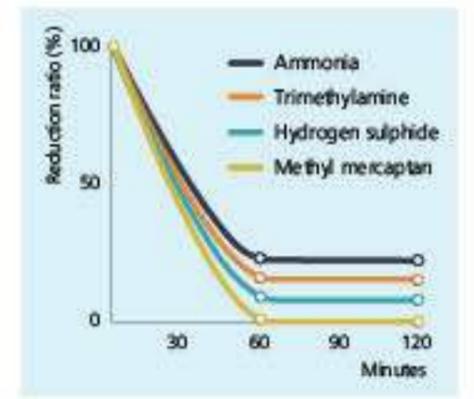

Removes and decomposes 25 allergic substances

The filter decomposes allergic substances using artificial enzymes. These enzymes break down the protein bonds of allergens, making them harmless.

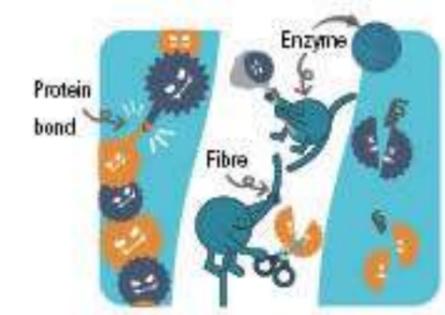

Pollen: Cedar (2 types), orchard grass, giant ragweed, birch, goldenrod, mugwort, phleum pratense, anthoxanthum odoratum
Animal: Dermatophagoides farinae (2 types), dermatophagoides pteronyssinus (2 types), cat dander, dog dander, cockroach (2 types), rat, flea
Mould: Aspergillus, cladosporium herbarum, hormodendrum hordei, penicillium notatum, penicillium digitatum, candida albicans
 Test method: Blis method

Removes and decomposes 99.9% of bacteria


Bacterial type	Possible infectious disease ¹	Number of inoculated bacteria		Percentage reduction
		Before test	After test	
Staphylococcus aureus	Skin infections, respiratory infections	Approx. 20,000	< 20	▶ 99.9%
Escherichia coli (E. coli)	Food poisoning	Approx. 20,000	< 20	
Klebsiella pneumoniae	Pneumonia, bloodstream infections	Approx. 20,000	< 20	
Pseudomonas aeruginosa	Pneumonia, bloodstream infections	Approx. 20,000	< 20	
MRSA	Skin infections	Approx. 20,000	< 20	
Moraxella	Respiratory infections	Approx. 20,000	< 20	

Test method: JS L 1902:2015 absorption method

Note: 1. This section provides just a few examples of the many possible infections.

Removes and decomposes viruses

The filter reduces virus infectivity titres to less than 1/1,000.

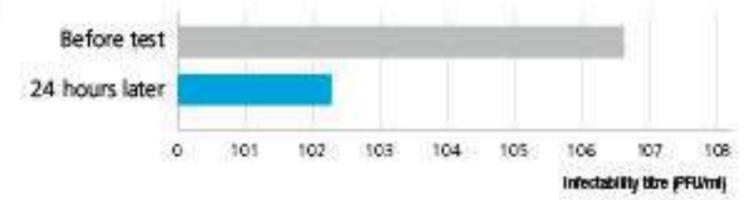

Test method: JS L 1922
 Test virus: Influenza A virus (H3N2)
 Contact time: 24 hours at a temperature of 25 degrees
 Infectivity titre measurement: Plaque assay

Simple yet stylish indoor unit designed to blend gracefully with any interior layout of your home.



STYLISH & COMPACT
Design

WITH THE COMPACT SIZE,

you can install our indoor units above the door at your home to solve space constraint as well as compliment your interior layout.*

*This compact size is available for 2.5 and 3.5 kW



EASY INSTALLATION

Designed with your needs in mind, our compact outdoor unit allows easy installation through a narrow window or limited space.*

*This compact size available for 2.5 and 3.5 kW



BEST FOR NARROW WINDOW


WIRELESS REMOTE CONTROLLER

NEW

ARC466A29

FREQUENTLY USED FUNCTIONS

- 1 Start & Confirm Setting
- 2 Select Fan Speed
 - Auto Fan Speed
 - Indoor Unit Quiet Operation
- 3 Inverter Powerful Mode
- 4 Sets Room Temperature 0.5°C Step Setting
- 5 Select Mode (Cooling / Dry / Fan Only)
- 6 • Econo Mode
 - Outdoor Unit Quiet Operation
- 7 Set Vertical Airflow
- 8 Set Horizontal Airflow
- 9 Comfort Airflow Mode
- 10 Intelligent Eye Mode

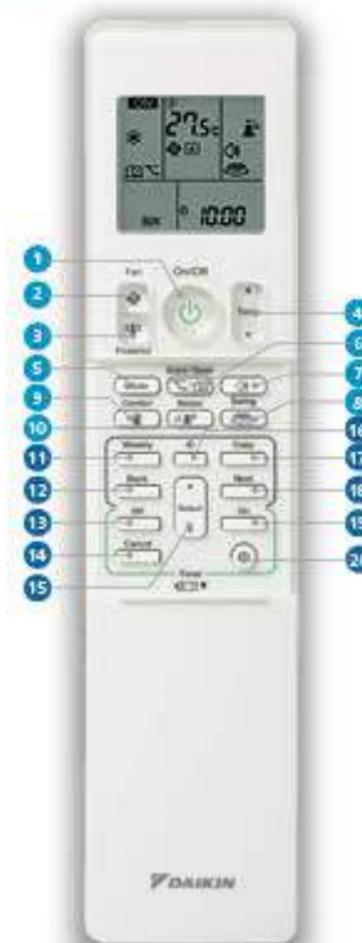

- 11 Weekly Timer Setting
- 12 Goes Back
- 13 24 Hour Off Timer
 - Night Set Mode
- 14 Cancels Timer
- 15 Select Timer Option (Mode, Setting, Day, Time & Temperature)
- 16 Start & Confirm Setting
- 17 Copy Setting
- 18 Goes Next
- 19 24 Hour On Timer
- 20 Sets Clock

NEW

Temperature Adjustments of 0.5°C

Temperatures can be set in precise steps of 0.5°C, allowing you to make fine adjustments for optimum comfort.

These subtle changes are useful when you need to make temperatures "slightly higher" or "slightly lower".

They also mean you do not have to constantly readjust the set temperature, helping to lower power consumption.

0.5°C Step Setting

WEEKLY TIMER



Beside ON/OFF operation, our weekly timer enables you to schedule setting for day, time and temperature. You can customize your desired temperature at the different time of each day of the week up to 4 timer settings.*

*4 timer settings a day if via "Daikin Mobile Controller"



Comfortable Airflow



Power-Airflow Flap

The Power-Airflow Flap flattens out during cooling operation to deliver cool air to the corners of a room. This function is available for the 2.5 and 3.5 kW models.



Power-Airflow Dual Flaps

The Power-Airflow Dual Flaps can flatten out during cooling operation to deliver cool air to the corners of a room. This function is available for the 5.0 to 7.1 kW models.



Wide-Angle Louvers

The Wide-Angle Louvers provide wide airflow coverage for effective operation no matter where the indoor unit is placed in a room.



Vertical Auto-Swing (up and down)

This function automatically moves the flaps up and down to distribute air across a room.



Horizontal Auto-Swing (left and right)

Horizontal Auto-Swing automatically moves the louvers to the left and right to cover a room with cool air.



Comfort Airflow Mode

This function prevents uncomfortable drafts from blowing directly on to the body. To prevent drafts, the flap moves upward during cooling operation.

▶ See page 12



3D Airflow

This function combines Vertical and Horizontal Auto-Swing to circulate a cloud of cool air right to the corners of even large spaces. The flaps and louvers swing in turn.



Lifestyle Convenience



Standby Electricity Saving

Even when an air conditioner is not operating, it requires standby power. However, thanks to this function, the required standby power can be reduced.



Econo Mode

This mode limits the maximum power consumption. It improves operating efficiency and also prevents circuit breakers from being overloaded.



Inverter Powerful Operation

This function boosts cooling performance for a 20 minute period. It is convenient when it is necessary to change the room temperature quickly.



Wireless Remote Controller with Backlight

The backlit LCD allows easy operation in the dark.



Daikin Mobile Controller

This built-in wireless LAN connecting adaptor and its application Daikin Mobile Controller turn a smartphone into a remote controller which can be used inside or outside the home. Together they help to maintain comfort while saving energy and eliminate any worries about forgetting to turn off the air conditioner. Voice control is available using smart speakers and the Google Assistant or Amazon Alexa applications.

▶ See pages 7 and 8



Indoor Unit On/Off Switch

The unit can be conveniently started by hand if the wireless remote controller is misplaced or its batteries are not charged.

Indoor on/off switch



Comfort Control



Indoor Unit Quiet Operation

Indoor unit operating sound pressure levels are decreased from the Low setting fan speed using the wireless remote controller.




Outdoor Unit Quiet Operation

Outdoor unit operating sound pressure levels can be decreased from the rated operation sound using the wireless remote controller.



Auto Fan Speed

The microprocessor automatically adjusts the fan speed to high to rapidly reach the set temperature. Once the temperature is achieved, this function reduces the fan speed to low.

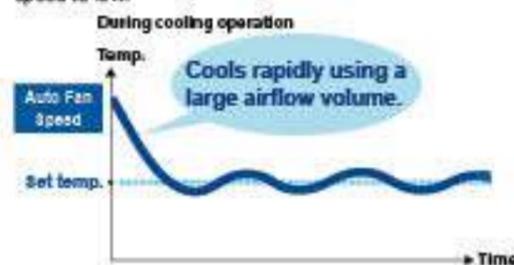

Intelligent Eye (auto energy saving)

Intelligent Eye with its infrared sensor automatically controls air conditioner operation according to human movement in a room. When there is no movement for 20 minutes, it adjusts the temperature by approximately 2°C for energy savings.

▶ See page 12



Programme Dry Function with Humidity Sensor

This function significantly improves dehumidifying. It features a humidity sensor with the ability to automatically adjust humidity even at low fan speeds.

▶ See page 11

Cleanliness



Air Quality Filter (Enzyme Blue/PM 2.5)

This filter combines deodorising and dust collection filters. It adsorbs and removes viruses, bacteria, odours and PM 2.5. It also breaks down allergens using artificial enzymes to make them harmless.

▶ See pages 13 and 14



Mould-Proof Air Filter

The air filter is impregnated with a mould preventative. The substance stops any growth, increase in number or activity by mould on the filter surface.



Wipe-Clean Flat Panel

The flat panel design can be cleaned with only the single pass of a cloth across its smooth surface. The flat panel can also be easily removed for more thorough cleaning.



Removable Drain Pan

The drain pan collects condensation from the indoor heat exchanger fins. Removable drain pans help to reduce the cleaning time and ensure a perfect finish.

Timers



24 Hour On/Off Timer

This timer can start or stop the air conditioner within a 24 hour period. It can be preset in 10 minute steps by pressing the on/off timer button on the wireless remote controller. The on timer and off timer can be used in combination.



Weekly Timer

The Weekly Timer allows up to four actions to be programmed for each day of the week. It is possible to schedule not only the on and off times, but also the desired temperatures during these periods. The copy function also makes the setting much easier and enables a daily programme to be repeated on other days as required.

▶ See page 12



Night Set Mode

Pressing the off timer button automatically selects Night Set Mode. This function prevents excessive cooling for a pleasant sleep. After 60 minutes, the room temperature is raised by 0.5°C for cooling operation.

Worry Free



Auto-Restart after Power Failure

The air conditioner memorises the settings for operation mode (automatic, cooling, dry and fan only), airflow, temperature, etc., and automatically returns to them when power is restored after a power failure.



Self-Diagnosis with Remote Controller

Malfunction codes are shown on the digital display panel of the wireless remote controller for fast and easy maintenance.



Anti-Corrosion Treatment of Outdoor Heat Exchanger Fins

The outdoor unit's heat exchanger fins are processed using a special anti-corrosion treatment. The surface is covered with a thin acrylic resin layer to enhance the fins' resistance to acid rain and salt corrosion.



WALL MOUNTED TYPE INDOOR UNIT

FTKM25/35XVMG



FTKM25/35XVMG



RKM25/35XVMG

Model name	Indoor unit		FTKM25XVMG	FTKM35XVMG
	Outdoor unit		RKM25XVMG	RKM35XVMG
Capacity	Rated (Min.-Max.)	kW	2.5 (1.2-3.4)	3.5 (1.3-4.0)
		Btu/h	8,500 (4,100-11,600)	11,900 (4,400-13,600)
Power supply	1 phase, 230 V, 50 Hz			
Running current	Rated	A	2.7	4.2
Power consumption	Rated (Min.-Max.)	W	510 (160-880)	910 (160-1,100)
COP		W/W	4.90	3.85
Weighted COP		kWh/kWh	5.71	4.82
Indoor unit			FTKM25XVMG	FTKM35XVMG
Front panel colour	White			
Airflow rate	H	m ³ /min(dfm)	12.2 (429)	
Fan speed	5 steps, quiet and automatic			
Sound pressure level	H/L/S/L	dB (A)	46/26/19	47/27/20
Dimensions	H x W x D	mm	285 x 770 x 223	
Machine weight		kg	9	
Outdoor unit			RKM25XVMG	RKM35XVMG
Casing colour	Ivory white			
Compressor	Type	Hermetically sealed swing type		
	Motor output	W	650	
Refrigerant	Type	R-32		
	Charge volume	kg	0.70	
Sound pressure level	H/S/L	dB (A)	48/43	48/44
Dimensions	H x W x D	mm	550 x 675 x 284	
Machine weight		kg	26	
Operation range	Cooling	C/DB	19.4 to 46	
	Liquid		ø6.4	
Piping connection	Gas	mm	ø9.5	
	Drain		ø16.0	
			15	
Max. piping length		m	12	

WALL MOUNTED TYPE INDOOR UNIT

FTKM50/60/71XVMG



FTKM50/60/71XVMG



RKM50/60/71XVMG

Model name	Indoor unit		FTKM60XVMG	FTKM60XVMG	FTKM71XVMG
	Outdoor unit		RKM60XVMG	RKM60XVMG	RKM71XVMG
Capacity	Rated (Min.-Max.)	kW	5.0 (1.4-6.0)	6.0 (1.9-7.0)	7.1 (2.1-7.5)
		Btu/h	17,100 (4,800-20,500)	20,500 (6,500-23,900)	24,200 (7,200-25,600)
Power supply	1 phase, 230 V, 50 Hz				
Running current	Rated	A	5.4	6.8	9.3
Power consumption	Rated (Min.-Max.)	W	1,220 (360-1,740)	1,960 (360-2,000)	2,100 (400-2,650)
COP		W/W	4.10	3.85	3.38
Weighted COP		kWh/kWh	5.01	4.70	4.40
Indoor unit			FTKM60XVMG	FTKM60XVMG	FTKM71XVMG
Front panel colour	White				
Airflow rate	H	m ³ /min(dfm)	17.6 (621)	19.0 (671)	
Fan speed	5 steps, quiet and automatic				
Sound pressure level	H/L/S/L	dB (A)	48/34/27	48/35/29	50/37/29
Dimensions	H x W x D	mm	295 x 990 x 262		
Machine weight		kg	13		
Outdoor unit			RKM60XVMG	RKM60XVMG	RKM71XVMG
Casing colour	Ivory white				
Compressor	Type	Hermetically sealed swing type			
	Motor output	W	1,300	1,300	
Refrigerant	Type	R-32			
	Charge volume	kg	1.00	1.05	
Sound pressure level	H/S/L	dB (A)	49/43	51/46	
Dimensions	H x W x D	mm	595 x 845 x 300		
Machine weight		kg	36	40	
Operation range	Cooling	C/DB	19.4 to 46		
	Liquid		ø6.4		
Piping connection	Gas	mm	ø12.7		
	Drain		ø16.0		
			ø15.9		
Max. piping length		m	30		
Max. level difference			20		

Measurement conditions

- Cooling capacity is based on: indoor temp. 27°C DB, 19°C DB; outdoor temp. 35°C DB; piping length 7.5 m.
 - Sound pressure levels are measured in an anechoic chamber based on temperature condition 1 above.
- These values are normally somewhat higher during actual operation as a result of ambient conditions.

Indoor Unit

No.	Item	FTKM20/30X	FTKM00/60/71X
1	Remote control PC-board set	BRP067A42	BRP080B42
2	Wiring adaptor for time clock/remote controller (Normal open pulse contact/normal open contact)		KRP4138B1S
3	Wireless LAN connecting adaptor		BRP072C42
4	Titanium apakite deodorising filter		KAF070A46
5	Dust collection filter (PM 2.5)		BAFP046A41
6	Deodorising filter (enzyme blue)		BAFP044A41
7	Air quality filter (enzyme blue/PM 2.5)		BAFP044A43
8	Remote controller loss prevention with chain		KKP910A4

Notes: *1. A remote control PC-board set (BRP067A42 or BRP080B42) is also required for each indoor unit.
 *2. The filter is a standard accessory.
 *3. This adaptor is a standard device.

Wireless LAN connecting adaptor		BRP072C42
Dimensions (H x W x D)		79 x 49 x 17.5 mm
Gross weight		36 g
Wireless LAN standard		IEEE802.11 b/ g/n (2.4 GHz)
Accessories	Wire harnesses (two units: Type A and Type B), screws (two pieces), double-faced tape (two pieces), holder, installation manual	



Outdoor Unit

No.	Item	RKM20/30/60/90/71X
1	Air direction adjustment grille	KPW937F4
2	Drain plug	KKP937A4

Note: *1. One set includes five pieces for five units.



Control System

No.	Item	FTKM20/30X	FTKM00/60/71X
1	Central remote controller		DCS302CA61
2	Unified On/OFF controller		DCS301BA61
3	Schedule timer		DST301BA61
4	Interface adaptor for DII-NET use		KRP9288B2S
5	Remote control PC-board set	BRP067A42	BRP080B42

Notes: *1. An interface adaptor for DII-NET use (KRP9288B2S) is also required for each indoor unit.
 *2. A remote control PC-board set (BRP067A42 or BRP080B42) is also required for each indoor unit.



COMMUNICATING WITH YOUR HOME

Reiri for Home

Smart home technology promises to provide your living with an enhanced lifestyle of comfort, convenience, home ecosystems and security. With a smart home system, a variety of electronic devices and appliances can be connected to communicate with each other as well as with you.

Whether you're at work or on vacation, you can seamlessly control your air-conditioners, air purifier, lightings and even security systems from your smartphone.

MAKING YOUR HOME SMARTER



COMFORT



ENERGY



SECURITY



LIFESTYLE





Perfecting the Air

For a Healthier, Greener & Smarter Tomorrow



IEQ
Perfecting
Indoor Environmental
Quality



ECO
Perfecting
Sustainability



IoT
Perfecting
Smart Solutions

Contact Details

DAIKIN AIRCONDITIONING (SINGAPORE) PTE. LTD.
(Singapore Main Office)

10 Ang Mo Kio Industrial Park 2, Singapore 569501

☎ 65 6583 8888 (Main Office) ☎ 65 6311 8686 (Call Center)

✉ sales@daikin.com.sg

Operating Hours

(Main Office)

Monday to Friday: 8:30 am to 6:00 pm

Saturday, Sunday & Public Holiday: Closed

(Call Center)

Monday to Friday: 8:30 am to 6:00 pm

Saturday, Sunday & Public Holiday: Closed

Follow us on our social platforms now! @DaikinSG



The specifications, designs and other content included in this brochure are current as of March 2023 and subject to change without notice.

Find out more



PCRS/G2302qprv