



LG AIR CONDITIONERS

Make Your Life Cool



Plasmaster™ Ionizer⁺

Auto Cleaning

Ocean Black Fin

LG ThinQ™

RESIDENTIAL

LINE-UP

• INVERTER MULTI SPLIT

Indoor Units			Model
Wall Mounted Unit	Artcool Wi-Fi		AMNC09GDJR0 AMNC12GDJR0 AMNC18GDKR0 AMNC24GDKR0
	Alpha Plus Wi-Fi		AMNQ09GSJC0 AMNQ12GSJC0 AMNQ18GSKC0 AMNQ24GSKC0
Ceiling Mounted Cassette	1 Way Cassette		AMNC09GTUA0 AMNC12GTUA0 AMNC18GTTA0 AMNC24GTTA0
	4 Way Cassette		AMNC12GTRA2 AMNC18GTQA2 AMNC24GTPA2
Ceiling Concealed Duct	Low Static Pressure		AMNQ12GL2A0 AMNQ18GL2A0 AMNQ24GL3A0

*Specifications may vary for each model.

• WALL MOUNTED SINGLE SPLIT (R410A / R32)

Indoor Units	Model
Standard - R410A	S4NQ09JA3AA S4NQ12JA3AA S4NQ18K23AA BSNQ246K3B3
Standard - R32	S3NQ09JL1PA S3NQ12JL1PA S3NQ18K21PA

Outdoor Units	Energy Labeling Scheme	
 A3UQ18GFA0 Up to 3 indoor units		
 A3UQ26GFA4 Up to 3 indoor units		
 A4UQ28GFA0 Up to 4 indoor units		

Plasmaster™ Ionizer⁺


The powerful plasma ionizer protects you from **bad odors** and **harmful** and **contagious particles** in the air with over 3 million ions to sterilize not only the air passing through the air conditioner, but also surrounding surfaces for a safer, and cleaner environment.

* Specifications may vary for each model.
* Depending on the experimental conditions.

• How It Works

Sterilization and Deodorization (Utilizes Over 3 Million Ions)

Plasmaster Ionizer+ reduces harmful and contagious microscopic particles by infusing the air passing through the air conditioner with over 3 million ions.

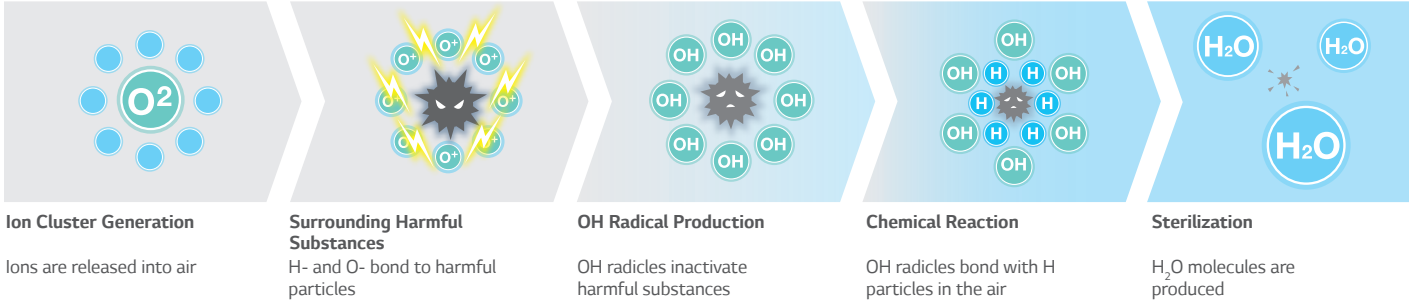


Auto Cleaning

An Internal Clean that's Automatic

The interior of the air conditioner is maintained clean by drying off the heat exchanger, then sterilizing the interior once more.

Cleans Filter with Regular Airflow

The comprehensive auto cleaning function prevents the formation of bacteria and mold on the heat exchanger, providing a more pleasant and comfortable environment.

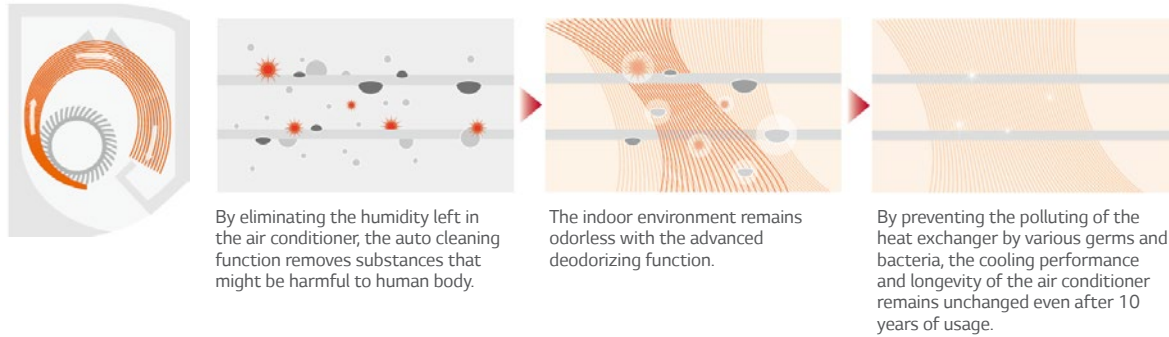

Removes Harmful Particles

Auto Cleaning provides clean air by preventing bacteria, mold and odors that can otherwise accumulate in an indoor unit.



Integrated Home Appliances Control
Control/ Monitor all your LG appliances from one place using Android or iOS based smartphones.





Download the 'LG ThinQ™' app from the Google Downloads or the Appstore.



Access your air conditioner anytime and from anywhere
with a Wi-Fi equipped device and LG's exclusive control app, LG ThinQ™.



Ocean Black Fin

Corrosion Resistance Black Fin
The black coating with enhanced epoxy resin is applied for strong protection from various corrosive external conditions such as salt contamination and air pollution including fumes.



MULTI SPLIT OVERVIEW*

SMART		ENERGY EFFICIENCY		DURABILITY	HEALTH		FAST COOLING		COMFORT				
													
Embedded Wi-Fi	Smart Diagnosis	Active Energy Control	Magic Display	Black Fin™	Plasmaster Ionizer ^{PLUS}	Dual Protection Filter	Auto Cleaning	Jet Cool	4 Way Swing	Comfort Air	Low Noise 19dB	Silent Mode 3dB	Quick & Easy Installation

*Specifications may vary for each model.

R410A MULTI SPLIT

SPECIFICATIONS OF INDOOR UNITS

WALL MOUNTED
ARTCOOL
Wi-Fi



MODEL NAME		AMNC09GDJR0	AMNC12GDJR0	AMNC18GDKR0	AMNC24GDKR0
Capacity Cooling	Btu/h	9,000	12,000	18,000	24,000
Power Supply	V, Ø, Hz	230, 1, 50	230, 1, 50	230, 1, 50	230, 1, 50
Power Input	Min-Rated-Max W	9 ~ 18 ~ 30	9 ~ 19 ~ 30	26 ~ 39 ~ 60	27 ~ 45 ~ 60
Running Current	Min-Rated-Max Amp	0.12 ~ 0.16 ~ 0.20	0.12 ~ 0.17 ~ 0.20	0.22 ~ 0.28 ~ 0.40	0.24 ~ 0.33 ~ 0.40
Dimensions	Body W x H x D mm	837 x 308 x 192	837 x 308 x 192	998 x 345 x 212	998 x 345 x 212
	Packaging W x H x D mm	892 x 383 x 256	892 x 383 x 256	1,063 x 422 x 281	1,063 x 422 x 281
Weight	Body Kg	9.2	9.2	12.6	13.2
	Packaging Kg	11.4	11.4	15.0	15.7
Air Flow Rate	H / M / L m3/min	7.7 / 6.4 / 5.0	8.1 / 6.7 / 5.3	14.2 / 11.3 / 9.9	15.2 / 12.7 / 10.2
Sound Pressure Level	H / M / L dB(A)	36 / 32 / 27	38 / 34 / 29	44 / 38 / 34	46 / 41 / 36
Piping	Liquid mm(inch)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)
Connections	Gas mm(inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 12.7 (1/2)	Ø 12.7 (1/2)
Drain	O.D. / I.D. mm	Ø 21.5 / 16.0	Ø 21.5 / 16.0	Ø 21.5 / 16.0	Ø 21.5 / 16.0
Power and Communication Cable (included Earth)		No. x mm2	4C x 0.75	4C x 0.75	4C x 0.75



WALL MOUNTED
ALPHA PLUS
Wi-Fi



MODEL NAME		AMNQ09GSJC0	AMNQ12GSJC0	AMNQ18GSKC0	AMNQ24GSKC0
Capacity Cooling	Btu/h	9,000	12,000	18,000	24,000
Power Supply	V, Ø, Hz	230, 1, 50	230, 1, 50	230, 1, 50	230, 1, 50
Power Input	Min-Rated-Max W	9 ~ 18 ~ 30	9 ~ 19 ~ 30	26 ~ 39 ~ 60	27 ~ 45 ~ 60
Running Current	Min-Rated-Max Amp	0.12 ~ 0.16 ~ 0.20	0.12 ~ 0.17 ~ 0.20	0.22 ~ 0.28 ~ 0.40	0.24 ~ 0.33 ~ 0.40
Dimensions	Body W x H x D mm	837 x 308 x 189	837 x 308 x 189	998 x 345 x 210	998 x 345 x 210
	Packaging W x H x D mm	892 x 381 x 249	892 x 381 x 249	1,063 x 420 x 274	1,063 x 420 x 274
Weight	Body Kg	8.2	8.2	11.2	11.8
	Packaging Kg	10.1	10.1	14.4	15.0
Air Flow Rate	H / M / L m3/min	7.7 / 6.4 / 5.0	8.1 / 6.7 / 5.3	14.2 / 11.3 / 9.9	15.2 / 12.7 / 10.2
Sound Pressure Level	H / M / L dB(A)	36 / 32 / 27	38 / 34 / 29	44 / 38 / 34	46 / 41 / 36
Piping	Liquid mm(inch)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)
Connections	Gas mm(inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 12.7 (1/2)	Ø 12.7 (1/2)
Drain	O.D. / I.D. mm	Ø 21.5 / 16.0	Ø 21.5 / 16.0	Ø 21.5 / 16.0	Ø 21.5 / 16.0
Power and Communication Cable (included Earth)		No. x mm2	4C x 0.75	4C x 0.75	4C x 0.75



SPECIFICATIONS OF INDOOR UNITS

CEILING MOUNTED CASSETTE

1 WAY CASSETTE



MODEL NAME		AMNC09GTUA0	AMNC12GTUA0	AMNC18GTTA0	AMNC24GTTA0
Capacity Cooling	Btu/h	9,000	12,000	18,000	24,000
Power Supply	V, Ø, Hz	220-240, 50/60, 1	220-240, 50/60, 1	220-240, 50/60, 1	220-240, 50/60, 1
Running Current	Amp	0.22	0.22	0.31	0.31
Dimensions	Body W x H x D	mm 860 x 132 x 450	860 x 132 x 450	1,180 x 132 x 450	1,180 x 132 x 450
Weight	Body	Kg 13.5	13.5	15.6	15.6
Air Flow Rate	H / M / L	m3/min 7.5 / 7.3 / 6.8	8.1 / 7.4 / 7.0	13.3 / 11.8 / 10.8	14.0 / 13.3 / 11.8
Sound Pressure Level	H / M / L	dB(A) 36 / 34 / 32	37 / 36 / 33	40 / 37 / 35	43 / 40 / 36
Piping Connections	Liquid	mm(inch) Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)
	Gas	mm(inch) Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 12.7 (1/2)	Ø 12.7 (1/2)
Drain	O.D. / I.D.	mm Ø 32.0 / 25.0	Ø 32.0 / 25.0	Ø 32.0 / 25.0	Ø 32.0 / 25.0
Power and Communication Cable (included Earth)		No. x mm2 4C x 0.75	4C x 0.75	4C x 0.75	4C x 0.75
Decoration Panel	Model Name	-	PT-UUC	PT-UUC	PT-UTC
	Casing color	-	White	White	White
	Dimensions W x H x D	mm 1,100 x 34 x 500	1,100 x 34 x 500	1,420 x 34 x 500	1,420 x 34 x 500
	Net weight	Kg 4.4	4.4	5.0	5.0

CEILING MOUNTED CASSETTE

4 WAY CASSETTE



MODEL NAME		AMNC12GTRA2	AMNC18GTQA2	AMNC24GTPA2
Capacity Cooling	Btu/h	12,000	18,000	24,000
Power Supply	V, Ø, Hz	230, 1, 50	230, 1, 50	230, 1, 50
Running Current	Amp	0.35	0.43	0.60
Dimensions	Body W x H x D	mm 570 x 214 x 570	570 x 256 x 570	840 x 204 x 840
Weight	Body	Kg 14.0	15.0	21.0
Air Flow Rate	H / M / L	m3/min 9.5 / 8.0 / 6.5	13.0 / 12.0 / 10.0	17.0 / 15.0 / 13.0
Sound Pressure Level	H / M / L	dB(A) 35 / 31 / 27	40 / 37 / 34	39 / 37 / 34
Piping Connections	Liquid	mm(inch) Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)
	Gas	mm(inch) Ø 9.52 (3/8)	Ø 12.7 (1/2)	Ø 12.7 (1/2)
Drain	O.D. / I.D.	mm Ø 32.0 / 25.0	Ø 32.0 / 25.0	Ø 32.0 / 25.0
Power and Communication Cable (included Earth)		No. x mm2 4C x 0.75	4C x 0.75	4C x 0.75
Decoration Panel	Dimensions W x H x D	mm 700 x 22 x 700	700 x 22 x 700	950 x 25 x 950
	Net weight	Kg 3.0	3.0	5.0

CEILING CONCEALED DUCT

LOW STATIC PRESSURE



MODEL NAME		AMNQ12GL2A0	AMNQ18GL2A0	AMNQ24GL3A0
Capacity Cooling	Btu/h	12,000	18,000	24,000
Power Supply	V, Ø, Hz	230, 1, 50	230, 1, 50	230, 1, 50
Running Current	Amp	0.80	0.80	1.0
Dimensions	Body W x H x D	mm 900 x 190 x 700	900 x 190 x 700	1,100 x 190 x 700
Weight	Body	Kg 23.0	23.0	27.0
Air Flow Rate	High-static Mode H / M / L	m3/min 10.0 / 8.5 / 7.0	15.0 / 12.5 / 10.0	20.0 / 16.0 / 12.0
Sound Pressure Level	H / M / L	dB(A) 31 / 28 / 27	36 / 34 / 31	39 / 35 / 32
Piping Connections	Liquid	mm(inch) Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)
	Gas	mm(inch) Ø 9.52 (3/8)	Ø 12.7 (1/2)	Ø 12.7 (1/2)
Drain	O.D. / I.D.	mm Ø 32.0 / 25.0	Ø 32.0 / 25.0	Ø 32.0 / 25.0
Power and Communication Cable (included Earth)		No. x mm2 4C x 0.75	4C x 0.75	4C x 0.75

SPECIFICATIONS OF OUTDOOR UNITS



System-3



OUTDOOR MODEL			A3UQ18GFA0
Number of Connectable Indoor Units (Up to)			Each 3
Cooling	Capacity	Min-Rated-Max.	Btu/h 4,950 - 17,600 - 23,700
	Power Input	Min-Rated-Max.	kW 1.45 - 5.16 - 6.95
Power Supply			V, Ø, Hz 230, 1, 50
Running Current	Cooling	Min-Rated-Max.	Amp 1.8 - 5.1 - 10.2
Dimensions			mm 770 x 545 x 288
Net Weight			kg 36
Refrigerant	Type		R410A
	Precharged Amount		gram 1,400
Sound Pressure Level	Estimated Chargeless-Pipe Length		metre 50
	Cooling		dB(A) 47
Piping Connections	Liquid	Outer Dia.	mm(inch) x No. Ø 6.35 (1/4) x 3
	Gas	Outer Dia.	mm(inch) x No. Ø 9.52 (3/8) x 3
Piping Length	Total Piping	Max.	metre 50
Maximum Height Difference	Each Branch Piping	Max.	metre 25
	Outdoor Unit - Indoor Unit	Max.	metre 15
Operation Range (Outdoor Temperature)	Indoor Unit - Indoor Unit	Max.	metre 7.5
Full Load COP	Cooling	Min. - Max.	°C DB -5 - 48
Weighted COP**			4.90
			5.80



System-3



OUTDOOR MODEL			A3UQ26GFA4
Number of Connectable Indoor Units (Up to)			Each 3
Cooling Capacity	Rated		W 6200
			Btu/h 21150
Power Supply			V, Ø, Hz 220-240 V 1 ø50 Hz
			W/W 4.92
Efficiency	EER		W/W 5.30
Running Current	COP (Weighted)		W/W 14
	Maximum Running Current		A 14
Dimensions	Net(W x H x D)		mm 870 x 650 x 330
Weight	Net		kg 44
Refrigerant	Type		- R410A
Pipe Connecting Socket	Liquid	mm(inch) x No.	Ø 6.35 (1/4) x 3
	Gas	mm(inch) x No.	Ø 9.52 (3/8) x 3
Piping Length	Total Piping(Max)		m 50
Maximum Height Difference	IDU - ODU(Max)		m 15
	IDU - IDU(Max)		m 7.5
Sound Pressure Level (Outdoor Unit)	Cooling / Heating (@ 1.5m height)		dB(A) 47/-
Connecting Cable	Power Supply Cable(H07RN-F) (to ODU)		mm² x cores 2.5 x 3C
Electrical Characteristic	Minimum Circuit Amperes (MCA)		A 14
	Maximum Fuse Amperes (MFA)		A 20
	Comp. Rated Load Amperes (Max)		A 12
	Outdoor Fan Motor, Full Load Amperes		A 0.33
Combination Limit	Number of Indoor Units		EA 3



System-4



OUTDOOR MODEL			A4UQ28GFA0
Number of Connectable Indoor Units (Up to)			Each 4
Cooling	Capacity	Min-Rated-Max.	Btu/h 5,400 - 26,000 - 35,100
	Power Input	Min-Rated-Max.	kW 0.40 - 1.56 - 2.90
Power Supply			V, Ø, Hz 230, 1, 50
Running Current	Cooling	Min-Rated-Max.	Amp 2.1 - 7.0 - 13.0
Dimensions			mm 870 x 650 x 330
Net Weight			kg 45
Refrigerant	Type		Twin Rotary
	Precharged Amount		gram 1,700
Sound Pressure Level	Estimated Chargeless-Pipe Length		metre 50
	Cooling		dB(A) 47
Piping Connections	Liquid	Outer Dia.	mm(inch) x No. Ø 6.35 (1/4) x 4
	Gas	Outer Dia.	mm(inch) x No. Ø 9.52 (3/8) x 4
Piping Length	Total Piping	Max.	metre 70
Maximum Height Difference	Each Branch Piping	Max.	metre 25
	Outdoor Unit - Indoor Unit	Max.	metre 15
Operation Range (Outdoor Temperature)	Indoor Unit - Indoor Unit	Max.	metre 7.5
Full Load COP	Cooling	Min. - Max.	°C DB -5 - 48
Weighted COP**			5.00
			5.54

Note :
1. All data are based on the following conditions:
- Cooling Temperature : Indoor 27°C(80.6°F) DB / 19°C(66.2°F) WB
- Outdoor 35°C(95°F) DB / 24°C(75.2°F) WB
- Piping Length : Interconnected Pipe Length = 7.5m
- Difference Limit of Elevation (Outdoor - Indoor Unit) is Zero.
** Tested based on NEA Energy Labelling Scheme's requirement

2. Wiring cable size must comply with the applicable local and national code.
3. Due to our policy of innovation some specifications may be changed without notification.
4. Sound Level Values are measured at Anechoic chamber
Therefore, these values can be increased owing to ambient conditions during operation.

WALL MOUNTED SINGLE SPLIT

R410A

S4-Q09JA3AA / S4-Q12JA3AA / S4-Q18K23AA / BS-Q246K3B3



SET MODEL				S4-Q09JA3AA	S4-Q12JA3AA	S4-Q18K23AA	BS-Q246K3B3
NEA Energy Labelling Scheme							
Cooling	Capacity	Min.-Rated-Max.	Btu/h	2,000-9,200-12,500	2,000-12,000-13,500	3,400-18,000-20,000	3,070-22,000-27,300
	Power Input	Rated	Kw	0.74	1.03	1.51	1.84
Power Supply	Running Current	Max	Kw	1.00	1.29	2.40	3.70
		Rated	Amp	3.6	5.0	7.1	8.10
Air Flow Rate	IndoorMax	Max	m³/min	6.0	6.4	14.0	17.0
	OutdoorMax		m³/min	13	12	19	20.0
Moisture Removal			l/h.	28	28	49	49
Sound Level	IndoorH/M/L/SL		dB(A)+3	1.25	1.25	1.2	2.5
	OutdoorMax		dB(A)+3	38 / 32 / 24 / 18	38 / 32 / 24 / 18	42 / 37 / 34 / 29	47 / 32 / 37 / 28
Standard Pipe length / Max length				metre	metre	metre	metre
Max Elevation				7.5 / 20	7.5 / 20	7.5 / 20	7.5 / 30
Refrigerant	Type			R410A	R410A	R410A	R410A
	Precharged Amount		Kg	0.85	0.85	1.35	1.4
Piping Connections	Liquid Side		mm(inch)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)
	Gas Side		mm(inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 12.7 (1/2)	Ø 15.88 (5/8)
Dimensions	Indoor (W x H x D)		mm	837 x 302 x 189	837 x 302 x 189	998 x 345 x 210	998 x 345 x 210
	Outdoor (Wx H x D)		mm	720 x 500 x 270	720 x 500 x 270	870 x 650 x 330	870 x 650 x 330
Net Weight	Indoor		kg	8.9	8.9	11	12.6
	Outdoor		kg	24.5	24.5	40	43
*Operation Range (Outdoor Temperature)	Cooling	Min. ~ Max.	°C DB	21 ~ 48	21 ~ 48	21 ~ 48	21 ~ 48
Full Load COP				4.06	3.59	3.56	3.76
Weighted COP**				4.58	4.50	4.19	3.97

R32

S3-Q09JL1PA / S3-Q12JL1PA / S3-Q18K21PA



SET MODEL				S3-Q09JL1PA	S3-Q12JL1PA	S3-Q18K21PA
NEA Energy Labelling Scheme						
Cooling	Capacity	Min.-Rated-Max.	Btu/h	2,150-9,200-12,800	2,150-12,000-14,000	5,200-17,742-20,700
	Power Input	Rated	Kw	0.63	0.92	1.38
Power Supply	Running Current	Max	Kw	1.15	1.25	1.95
		Rated	Amp	3.20	4.50	6.50
Air Flow Rate	Indoor	Max	m³/min	5.50	6.00	9.00
	Outdoor		m³/min	13.0 / 10.0 / 6.6 / 4.2	13.0 / 10.0 / 6.6 / 4.2	18.0 / 12.7 / 10.2 / 8.4
Moisture Removal			l/h.	30.0	30.0	49.0
Sound Level	Indoor, H/M/L/SL		dB(A)+3	1.25	1.25	2.50
	Outdoor, Max		dB(A)+3	38 / 32 / 24 / 21	38 / 32 / 24 / 21	45 / 40 / 37 / 32
Standard Pipe length / Max length				metre	metre	metre
Max Elevation				7.5 / 20	7.5 / 20	7.5 / 30
Refrigerant	Type			R32	R32	R32
	Precharged Amount		Kg	0.85	0.85	1.05
Piping Connections	Liquid Side		mm(inch)	ø 6.35 (1/4)	ø 6.35 (1/4)	ø 6.35 (1/4)
	Gas Side		mm(inch)	ø 9.52 (3/8)	ø 9.52 (3/8)	ø 12.7 (1/2)
Dimensions	Indoor (W x H x D)		mm	837 x 308 x 189	837 x 308 x 189	998 x 345 x 210
	Outdoor (Wx H x D)		mm	770 x 545 x 288	770 x 545 x 288	870 x 650 x 330
Net Weight	Indoor		kg	9.2	9.2	11.6
	Outdoor		kg	29.0	29.0	42.0
*Operation Range (Outdoor Temperature)	Cooling	Min. ~ Max.	°C DB	18 ~ 48	18 ~ 48	18 ~ 48
Full Load COP				4.54	4.06	3.90
Weighted COP**				4.76	4.91	4.66

COMBINATION TABLE

A3UQ18GFA0 (Cooling_Combination of 8.5 Ampere Limited)

UNIT	Combination (kW)				Each Capacity (kW)			Total Capacity (kW)			Total Input (kW)			Total Current (A)		
	UNIT-A	UNIT-B	UNIT-C	Total	UNIT-A	UNIT-B	UNIT-C	Min	Rated	Max	Min	Rated	Max	Min	Rated	Max
1 Unit	2.6	-	-	2.6	2.64	-	-	1.45	2.64	3.55	0.38	0.57	0.91	1.8	2.7	4.3
	3.5	-	-	3.5	3.52	-	-	1.93	3.52	4.72	0.51	0.76	1.36	2.4	3.6	6.4
	5.3	-	-	5.3	5.16	-	-	2.84	5.16	6.07	0.72	1.08	1.80	3.4	5.1	8.5
2 Unit	2.6	2.6	-	5.3	2.58	2.58	-	2.84	5.16	6.07	0.72	1.08	1.80	3.4	5.1	8.5
	2.6	3.5	-	6.2	2.21	2.95	-	2.84	5.16	6.07	0.72	1.08	1.80	3.4	5.1	8.5
	3.5	3.5	-	7.0	2.58	2.58	-	2.84	5.16	6.07	0.72	1.08	1.80	3.4	5.1	8.5
	2.6	5.3	-	7.9	1.72	3.44	-	2.84	5.16	6.07	0.72	1.08	1.80	3.4	5.1	8.5
	3.5	5.3	-	8.8	2.06	3.09	-	2.84	5.16	6.07	0.72	1.08	1.80	3.4	5.1	8.5
3 Unit	2.6	2.6	2.6	7.9	1.72	1.72	1.72	2.84	5.16	6.07	0.72	1.08	1.80	3.4	5.1	8.5
	2.6	2.6	3.5	8.8	1.55	1.55	2.06	2.84	5.16	6.07	0.72	1.08	1.80	3.4	5.1	8.5
	2.6	3.5	3.5	9.7	1.41	1.88	1.88	2.84	5.16	6.07	0.72	1.08	1.80	3.4	5.1	8.5
	3.5	3.5	3.5	10.6	1.72	1.72	1.72	2.84	5.16	6.07	0.72	1.08	1.80	3.4	5.1	8.5

A3UQ26GFA4 (Cooling_Combination of 8.5 Ampere Limited)

UNIT	Combination (kW)				Each Capacity (kW)			Total Capacity (kW)			Total Input (kW)			Total Current (A)		
	UNIT-A	UNIT-B	UNIT-C	Total	UNIT-A	UNIT-B	UNIT-C	Min	Rated	Max	Min	Rated	Max	Min	Rated	Max
1 Unit	2.6	-	-	2.6	2.64	-	-	1.45	2.64	3.16	0.47	0.61	0.86	2.1	2.7	3.9
	3.5	-	-	3.5	3.52	-	-	2.11	3.52	4.22	0.49	0.84	1.16	2.2	3.8	5.3
	5.3	-	-	5.3	5.27	-	-	3.16	5.27	6.33	0.76	1.29	1.81	3.5	5.9	8.2
	7.0	-	-	7.0	6.20	-	-	4.22	6.20	6.68	1.03	1.52	1.90	4.7	6.9	8.5
2 Unit	2.6	2.6	-	5.3	2.64	2.64	-	3.16	5.27	6.33	0.72	1.23	1.74	3.2	5.6	7.9
	2.6	3.5	-	6.2	2.64	3.52	-	3.69	6.15	6.91	0.80	1.44	1.90	3.6	6.5	8.5
	3.5	3.5	-	7.0	3.10	3.10	-	4.19	6.20	6.91	0.96	1.44	1.90	4.3	6.5	8.5
	2.6	5.3	-	7.9	2.07	4.13	-	4.19	6.20	7.03	0.96	1.44	1.90	4.3	6.5	8.5
	3.5	5.3	-	8.8	2.48	3.72	-	4.19	6.20	7.03	0.96	1.44	1.90	4.3	6.5	8.5
	2.6	7.0	-	9.7	1.69	4.51	-	4.19	6.20	7.03	0.96	1.44	1.90	4.3	6.5	8.5
	5.3	5.3	-	10.5	3.10	3.10	-	4.19	6.20	7.03	0.96	1.44	1.90	4.3	6.5	8.5
	3.5	7.0	-	10.5	2.07	4.13	-	4.19	6.20	7.03	0.96	1.44	1.90	4.3	6.5	8.5
	5.3	7.0	-	12.3	2.66	3.54	-	4.19	6.20	7.03	0.96	1.44	1.90	4.3	6.5	8.5
	7.0	7.0	-	14.1	3.10	3.10	-	4.19	6.20	7.03	0.96	1.44	1.90	4.3	6.5	8.5
	2.6	2.6	2.6	7.9	2.07	2.07	2.07	4.19	6.20	7.33	0.86	1.26	1.90	3.9	5.7	8.5
	2.6	2.6	3.5	8.8	1.86	1.86	2.48	4.19	6.20	7.33	0.86	1.26	1.90	3.9	5.7	8.5
	2.6	3.5	3.5	9.7	1.69	2.25	2.25	4.19	6.20	7.33	0.86	1.26	1.90	3.9	5.7	8.5
	2.6	2.6	5.3	10.5	1.55	1.55	3.10	4.19	6.20	7.33	0.86	1.26	1.90	3.9	5.7	8.5
	3.5	3.5	3.5	10.5	2.07	2.07	2.07	4.19	6.20	7.33	0.86	1.26	1.90	3.9	5.7	8.5
	2.6	3.5	5.3	11.4	1.43	1.91	2.86	4.19	6.20	7.33	0.86	1.26	1.90	3.9	5.7	8.5
	2.6	2.6	7.0	12.3	1.33	1.33	3.54	4.19	6.20	7.33	0.86	1.26	1.90	3.9	5.7	8.5
	3.5	3.5	5.3	12.3	1.77	1.77	2.66	4.19	6.20	7.33	0.86	1.26	1.90	3.9	5.7	8.5
	2.6	3.5	7.0	13.2	1.24	1.65	3.31	4.19	6.20	7.33	0.86	1.26	1.90	3.9	5.7	8.5
	2.6	5.3	5.3	13.2	1.24	2.48	2.48	4.19	6.20	7.33	0.86	1.26	1.90	3.9	5.7	8.5
	3.5	3.5	7.0	14.1	1.55	1.55	3.10	4.19	6.20	7.33	0.86	1.26	1.90	3.9	5.7	8.5
	3.5	5.3	5.3	14.1	1.55	2.33	2.33	4.19	6.20	7.33	0.86	1.26	1.90	3.9	5.7	8.5
	2.6	5.3	7.0	14.9	1.09	2.19	2.92	4.19	6.20	7.33	0.86	1.26	1.90	3.9	5.7	8.5
	3.5	5.3	7.0	15.8	1.38	2.07	2.76	4.19	6.20	7.33	0.86	1.26	1.90	3.9	5.7	8.5
	5.3	5.3	5.3	15.8	2.07	2.07	2.07	4.19	6.20	7.33	0.86	1.26	1.90	3.9	5.7	8.5

A4UQ28GFA0 (Cooling_Combination of 8.5 Ampere Limited)

Room	Combination (kW)					Each Capacity (kW)				Total Capacity (kW)			Total Input (kW)			Total Current (A)		
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Min	Rated	Max	Min	Rated	Max	Min	Rated	Max
1 Room	2.6	-	-	-	2.6	2.6	-	-	-	1.58	2.64	3.55	0.40	0.57	1.01	1.8	2.6	4.5
	3.5	-	-	-	3.5	3.5	-	-	-	2.11	3.52	4.75	0.53	0.76	1.34	2.4	3.4	6.0
	5.3	-	-	-	5.3	5.3	-	-	-	3.17	5.28	6.71	0.79	1.13	1.90	3.5	5.1	8.5
	7.0	-	-	-	7.0	7.0	-	-	-	4.22	7.03	7.36	1.06	1.51	1.90	4.8	6.8	8.5
2 Rooms	2.6	2.6	-	-	5.3	2.6	2.6	-	-	3.17	5.28	7.12	0.79	1.13	1.90	3.5	5.1	8.5
	2.6	3.5	-	-	6.2	2.6	3.5	-	-	3.69	6.15	6.42	0.92	1.32	1.90	4.1	5.9	8.5
	3.5	3.5	-	-	7.0	3.5	3.5	-	-	4.22	7.03	7.33	1.06	1.51	1.90	4.8	6.8	8.5
	2.6	5.3	-	-	7.9	2.5	5.1	-	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	3.5	5.3	-	-	8.8	3.0	4.6	-	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	2.6	7.0	-	-	9.7	2.1	5.5	-	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	3.5	7.0	-	-	10.6	2.5	5.1	-	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	5.3	5.3	-	-	10.6	3.8	3.8	-	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	5.3	7.0	-	-	12.3	3.3	4.4	-	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	7.0	7.0	-	-	14.1	3.8	3.8	-	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
3 Rooms	2.6	2.6	2.6	-	7.9	2.5	2.5	2.5	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	2.6	2.6	3.5	-	8.8	2.3	2.3	3.0	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	2.6	3.5	3.5	-	9.7	2.1	2.8	2.8	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	2.6	2.6	5.3	-	10.6	1.9	1.9	3.8	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	3.5	3.5	3.5	-	10.6	2.5	2.5	2.5	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	2.6	3.5	5.3	-	11.4	1.8	2.3	3.5	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	2.6	2.6	7.0	-	12.3	1.6	1.6	4.4	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	3.5	3.5	5.3	-	12.3	2.2	2.2	3.3	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	2.6	3.5	7.0	-	13.2	1.5	2.0	4.1	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	2.6	5.3	5.3	-	13.2	1.5	3.0	3.0	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	3.5	3.5	7.0	-	14.1	1.9	1.9	3.8	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	3.5	5.3	5.3	-	14.1	1.9	2.9	2.9	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	2.6	5.3	7.0	-	14.9	1.3	2.7	3.6	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	3.5	5.3	7.0	-	15.8	1.7	2.5	3.4	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
4 Rooms	5.3	5.3	5.3	-	15.8	2.5	2.5	2.5	-	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	2.6	2.6	2.6	2.6	10.6	1.9	1.9	1.9	1.9	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	2.6	2.6	2.6	3.5	11.4	1.8	1.8	1.8	2.3	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	2.6	2.6	3.5	3.5	12.3	1.6	1.6	2.2	2.2	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	2.6	2.6	2.6	5.3	13.2	1.5	1.5	1.5	3.0	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	2.6	3.5	3.5	3.5	13.2	1.5	2.0	2.0	2.0	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	2.6	2.6	3.5	5.3	14.1	1.4	1.4	1.9	2.9	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	3.5	3.5	3.5	3.5	14.1	1.9	1.9	1.9	1.9	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	2.6	2.6	2.6	7.0	14.9	1.3	1.3	1.3	3.6	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	2.6	3.5	3.5	5.3	14.9	1.3	1.8	1.8	2.7	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	2.6	2.6	3.5	7.0	15.8	1.3	1.3	1.7	3.4	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	2.6	2.6	5.3	5.3	15.8	1.3	1.3	2.5	2.5	4.57	7.62	8.38	1.09	1.56	1.90	4.9	7.0	8.5
	3.5	3.5	3.5	5.3	15.8	1.7	1.7	1.7	2.5	4.57	7.62	8.38	0.94	1.56	1.90	4.2	7.0	8.5

COMBINATION TABLE

A3UQ18GFA0 (Cooling_Combination of Full Ampere Load)

UNIT	Combination (kW)				Each Capacity (kW)			Total Capacity (kW)			Total Input (kW)			Total Current (A)		
	UNIT-A	UNIT-B	UNIT-C	Total	UNIT-A	UNIT-B	UNIT-C	Min	Rated	Max	Min	Rated	Max	Min	Rated	Max
1 Unit	2.6	-	-	2.6	2.64	-	-	1.45	2.64	3.55	0.38	0.57	1.02	1.8	2.7	4.8
	3.5	-	-	3.5	3.52	-	-	1.93	3.52	4.72	0.51	0.76	1.36	2.4	3.6	6.4
	5.3	-	-	5.3	5.16	-	-	2.84	5.16	6.95	0.72	1.08	2.15	3.4	5.1	10.2
2 Unit	2.6	2.6	-	5.3	2.58	2.58	-	2.84	5.16	6.95	0.72	1.08	2.15	3.4	5.1	10.2
	2.6	3.5	-	6.2	2.21	2.95	-	2.84	5.16	6.95	0.72	1.08	2.15	3.4	5.1	10.2
	3.5	3.5	-	7.0	2.58	2.58	-	2.84	5.16	6.95	0.72	1.08	2.15	3.4	5.1	10.2
	2.6	5.3	-	7.9	1.72	3.44	-	2.84	5.16	6.95	0.72	1.08	2.15	3.4	5.1	10.2
3 Unit	3.5	5.3	-	8.8	2.06	3.09	-	2.84	5.16	6.95	0.72	1.08	2.15	3.4	5.1	10.2
	2.6	2.6	2.6	7.9	1.72	1.72	1.72	2.84	5.16	6.95	0.72	1.08	2.15	3.4	5.1	10.2
	2.6	2.6	3.5	8.8	1.55	1.55	2.06	2.84	5.16	6.95	0.72	1.08	2.15	3.4	5.1	10.2
	2.6	3.5	3.5	9.7	1.41	1.88	1.88	2.84	5.16	6.95	0.72	1.08	2.15	3.4	5.1	10.2
	3.5	3.5	3.5	10.6	1.72	1.72	1.72	2.84	5.16	6.95	0.72	1.08	2.15	3.4	5.1	10.2

A3UQ26GFA4 (Cooling_Combination of Full Ampere Load)

Room	Combination (kW)				Each Capacity (kW)			Total Capacity (kW)			Total Input (kW)			Total Current (A)		
	UNIT-A	UNIT-B	UNIT-C	Total	UNIT-A	UNIT-B	UNIT-C	Min	Rated	Max	Min	Rated	Max	Min	Rated	Max
1 Unit	2.6	-	-	2.6	2.64	-	-	1.45	2.64	3.16	0.47	0.61	0.86	2.1	2.7	3.9
	3.5	-	-	3.5	3.52	-	-	2.11	3.52	4.22	0.49	0.84	1.16	2.2	3.8	5.3
	5.3	-	-	5.3	5.27	-	-	3.16	5.27	6.33	0.76	1.29	1.81	3.5	5.9	8.2
	7.0	-	-	7.0	6.20	-	-	4.22	6.20	7.33	1.03	1.52	2.43	4.7	6.9	11
2 Unit	2.6	2.6	-	5.3	2.64	2.64	-	3.16	5.27	6.33	0.72	1.23	1.74	3.2	5.6	7.9
	2.6	3.5	-	6.2	2.64	3.52	-	3.69	6.15	7.38	0.80	1.44	2.43	3.6	6.5	11
	3.5	3.5	-	7.0	3.10	3.10	-	4.19	6.20	7.38	0.96	1.44	2.43	4.3	6.5	11
	2.6	5.3	-	7.9	2.07	4.13	-	4.19	6.20	7.50	0.96	1.44	2.43	4.3	6.5	11
	3.5	5.3	-	8.8	2.48	3.72	-	4.19	6.20	7.50	0.96	1.44	2.43	4.3	6.5	11
	2.6	7.0	-	9.7	1.69	4.51	-	4.19	6.20	7.50	0.96	1.44	2.43	4.3	6.5	11
	5.3	5.3	-	10.5	3.10	3.10	-	4.19	6.20	7.50	0.96	1.44	2.43	4.3	6.5	11
	3.5	7.0	-	10.5	2.07	4.13	-	4.19	6.20	7.50	0.96	1.44	2.43	4.3	6.5	11
	5.3	7.0	-	12.3	2.66	3.54	-	4.19	6.20	7.50	0.96	1.44	2.43	4.3	6.5	11
	7.0	7.0	-	14.1	3.10	3.10	-	4.19	6.20	7.50	0.96	1.44	2.43	4.3	6.5	11
3 Unit	2.6	2.6	2.6	7.9	2.07	2.07	2.07	4.19	6.20	8.20	0.86	1.26	2.43	3.9	5.7	11
	2.6	2.6	3.5	8.8	1.86	1.86	2.48	4.19	6.20	8.20	0.86	1.26	2.43	3.9	5.7	11
	2.6	3.5	3.5	9.7	1.69	2.25	2.25	4.19	6.20	8.20	0.86	1.26	2.43	3.9	5.7	11
	2.6	2.6	5.3	10.5	1.55	1.55	3.10	4.19	6.20	8.20	0.86	1.26	2.43	3.9	5.7	11
	3.5	3.5	3.5	10.5	2.07	2.07	2.07	4.19	6.20	8.20	0.86	1.26	2.43	3.9	5.7	11
	2.6	3.5	5.3	11.4	1.43	1.91	2.86	4.19	6.20	8.20	0.86	1.26	2.43	3.9	5.7	11
	2.6	2.6	7.0	12.3	1.33	1.33	3.54	4.19	6.20	8.20	0.86	1.26	2.43	3.9	5.7	11
	3.5	3.5	5.3	12.3	1.77	1.77	2.66	4.19	6.20	8.20	0.86	1.26	2.43	3.9	5.7	11
	2.6	3.5	7.0	13.2	1.24	1.65	3.31	4.19	6.20	8.20	0.86	1.26	2.43	3.9	5.7	11
	2.6	5.3	5.3	13.2	1.24	2.48	2.48	4.19	6.20	8.20	0.86	1.26	2.43	3.9	5.7	11
	3.5	3.5	7.0	14.1	1.55	1.55	3.10	4.19	6.20	8.20	0.86	1.26	2.43	3.9	5.7	11
	3.5	5.3	5.3	14.1	1.55	2.33	2.33	4.19	6.20	8.20	0.86	1.26	2.43	3.9	5.7	11
	2.6	5.3	7.0	14.9	1.09	2.19	2.92	4.19	6.20	8.20	0.86	1.26	2.43	3.9	5.7	11
	3.5	5.3	7.0	15.8	1.38	2.07	2.76	4.19	6.20	8.20	0.86	1.26	2.43	3.9	5.7	11
	5.3	5.3	5.3	15.8	2.07	2.07	2.07	4.19	6.20	8.20	0.86	1.26	2.43	3.9	5.7	11

COMBINATION TABLE

A4UQ28GFA0 (Cooling_Combination of Full Ampere Load)

Room	Combination (kW)					Each Capacity (kW)				Total Capacity (kW)			Total Input (kW)			Total Current (A)		
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Min	Rated	Max	Min	Rated	Max	Min	Rated	Max
1 Room	2.6	-	-	-	2.6	2.6	-	-	-	1.58	2.64	3.55	0.40	0.57	1.01	1.8	2.6	4.5
	3.5	-	-	-	3.5	3.5	-	-	-	2.11	3.52	4.75	0.53	0.76	1.34	2.4	3.4	6.0
	5.3	-	-	-	5.3	5.3	-	-	-	3.17	5.28	7.12	0.79	1.13	2.00	3.5	5.1	9.0
	7.0	-	-	-	7.0	7.0	-	-	-	4.22	7.03	9.50	1.06	1.51	2.81	4.8	6.8	12.6
2 Rooms	2.6	2.6	-	-	5.3	2.6	2.6	-	-	3.17	5.28	7.12	0.79	1.13	2.10	3.5	5.1	9.4
	2.6	3.5	-	-	6.2	2.6	3.5	-	-	3.69	6.15	8.29	0.92	1.32	2.45	4.1	5.9	11.0
	3.5	3.5	-	-	7.0	3.5	3.5	-	-	4.22	7.03	9.50	1.06	1.51	2.81	4.8	6.8	12.6
	2.6	5.3	-	-	7.9	2.5	5.1	-	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	3.5	5.3	-	-	8.8	3.0	4.6	-	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	2.6	7.0	-	-	9.7	2.1	5.5	-	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	3.5	7.0	-	-	10.6	2.5	5.1	-	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	5.3	5.3	-	-	10.6	3.8	3.8	-	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	5.3	7.0	-	-	12.3	3.3	4.4	-	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	7.0	7.0	-	-	14.1	3.8	3.8	-	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	Z	13.0
	2.6	2.6	2.6	-	7.9	2.5	2.5	2.5	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	2.6	2.6	3.5	-	8.8	2.3	2.3	3.0	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	2.6	3.5	3.5	-	9.7	2.1	2.8	2.8	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	2.6	2.6	5.3	-	10.6	1.9	1.9	3.8	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
3 Rooms	3.5	3.5	3.5	-	10.6	2.5	2.5	2.5	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	2.6	3.5	5.3	-	11.4	1.8	2.3	3.5	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	2.6	2.6	7.0	-	12.3	1.6	1.6	4.4	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	3.5	3.5	5.3	-	12.3	2.2	2.2	3.3	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	2.6	3.5	7.0	-	13.2	1.5	2.0	4.1	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	2.6	5.3	5.3	-	13.2	1.5	3.0	3.0	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	3.5	3.5	7.0	-	14.1	1.9	1.9	3.8	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	3.5	5.3	5.3	-	14.1	1.9	2.9	2.9	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	2.6	5.3	7.0	-	14.9	1.3	2.7	3.6	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	3.5	5.3	7.0	-	15.8	1.7	2.5	3.4	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	5.3	5.3	5.3	-	15.8	2.5	2.5	2.5	-	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	2.6	2.6	2.6	2.6	10.6	1.9	1.9	1.9	1.9	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	2.6	2.6	2.6	3.5	11.4	1.8	1.8	1.8	2.3	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	2.6	2.6	3.5	3.5	12.3	1.6	1.6	2.2	2.2	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
4 Rooms	2.6	2.6	2.6	5.3	13.2	1.5	1.5	1.5	3.0	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	2.6	3.5	3.5	3.5	13.2	1.5	2.0	2.0	2.0	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	2.6	2.6	3.5	5.3	14.1	1.4	1.4	1.9	2.9	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	3.5	3.5	3.5	3.5	14.1	1.9	1.9	1.9	1.9	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	2.6	2.6	2.6	7.0	14.9	1.3	1.3	1.3	3.6	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	2.6	3.5	3.5	5.3	14.9	1.3	1.8	1.8	2.7	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	2.6	2.6	3.5	7.0	15.8	1.3	1.3	1.7	3.4	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	2.6	2.6	5.3	5.3	15.8	1.3	1.3	2.5	2.5	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0
	3.5	3.5	3.5	5.3	15.8	1.7	1.7	1.7	2.5	4.57	7.62	10.29	1.09	1.56	2.90	4.9	7.0	13.0



LG Service Centre
991D Alexandra Road, #01-14, Singapore 119972
Tel: 6512 0555 Fax: 6223 9915
Email: lgesg@lge.com
(Mon-Fri: 8.30am-6pm, Sat: 8.30am-2pm)
Closed on Sundays and Public Holidays

LG Electronics Singapore Pte Ltd
8 Temasek Boulevard, #27-01 Suntec Tower 3, Singapore 038988
Tel: 6333 6092 Fax: 6337 6151

www.lg.com/sg

Distributed by